

KVM-0201

User Manual



Content


1.Overview	2
2.Components	2
3.Hardware Settings	4
4.Mouse Switching	5
5.Hotkey Operation	6
6.Specifications	7
7.Frequently Asked Questions	8

1.Overview

KVM-0201 is a 2 in 2 out UHD KVM switch that allows users to access to two dual DP display port computers via a single USB keyboard and mouse. Both input and output support DisplayPort1.2. With a built-in 1 USB 2.0 hub and 2.1 channel audio for rich bass surround sound. It supports superior video quality up to 4K UHD @ 60 Hz and 4K DCI @ 60Hz, displaying vivid high-definition images and providing high-quality sound effects for music, movies and games.


2.Components

Front panel

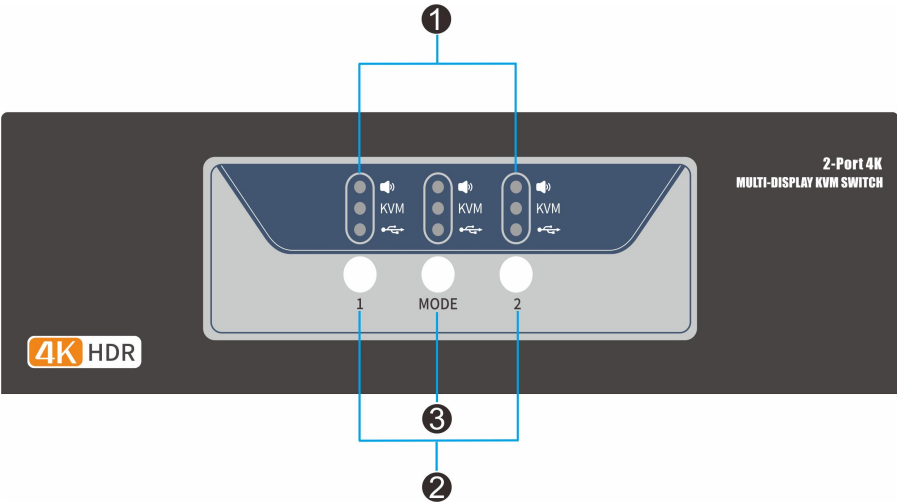

No.	Function	Description	
1	LED Status Panel	This panel contains three icons to indicate the mode and port status. And the mode and port selection buttons have three corresponding LED icons to indicate the status - KVM, audio and USB HUB.	
2	Port selection button	1	Press the button to switch to the corresponding port
		2	
3	Mode selection button	This button allows you to cycle between four modes – All, USB HUB+KVM, Audio+KVM, KVM. Long press for more than 8s to restore factory settings (hotkey Stroll-Lock/mouse switch function/auto scan time will be restored to factory settings).	

LED status panel

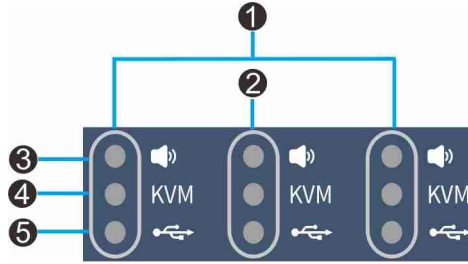

No.	Components
1	Port LED
2	Mode Selection LED
3	Audio LED
4	KVM LED
5	USB HUB LED

Mode selection button and mode indicator

Pressing the Mode Selection button at different times will light up different Mode LED.

Press Button	Mode LED that lights up
Once	KVM、Audio、USB HUB
Twice	USB HUB、KVM
Three times	Audio、KVM
Four times	KVM

Long press the mode button for more than 8 seconds to restore factory settings (hotkey Stroll-Lock/mouse switch function/auto scan time will be restored to factory settings)

3. Hardware Settings



1. It is important that all connected equipment must be properly grounded to prevent damage from electrical surges or static electricity.
2. Ensure that power of all devices will be connected to this installation are turned off. You must unplug the power cord of all computers with "Keyboard on" function.

Installation guide


Please refer to the installation diagrams on the next page and do the following:

1. Ground the equipment (Fig. ①).
2. Plug the monitor into the DP port on the rear panel of the equipment, and power on the monitor (Fig. ②).
3. Plug the microphone and speaker into the audio port on the rear panel of the equipment (Fig. ③).
4. Plug the DP cable into socket A of the KVM port section of the switch, then plug the USB cable, microphone/speaker cable into the corresponding sockets. Plug another DP cable into socket B of the same KVM (Fig. 4).
5. Plug the other end of the microphone/speaker cable into the corresponding port of the computer (Fig. ④).
6. Plug the other end of the DP cable and USB cable into the corresponding ports on the computer. Repeat steps 4, 5 and 6 to install another computer (Fig. ④).
7. Plug the USB keyboard and mouse into the USB HID port on the rear panel of the equipment (Fig. ⑤).
8. (Optional) Plug the USB peripheral into the USB peripheral port (Fig. ⑥).
9. Plug the included power adapter into an AC power source, and then plug the power adapter cable into the power jack of the KVM switch (Fig. ⑦).
10. Power on.


Note:

- ◆ By default, the switch is on the first port after it is powered on.
- ◆ It is recommended that the total length of the cable from the computer to the monitor (including KVM) does not exceed 3.3 meters.
- ◆ Selecting high-quality cables helps to ensure the resolution of 4K UHD (3840 x2160 @ 60hz) or 4K DCI (4096x2160 @ 60hz) can be reached.

Connection diagram

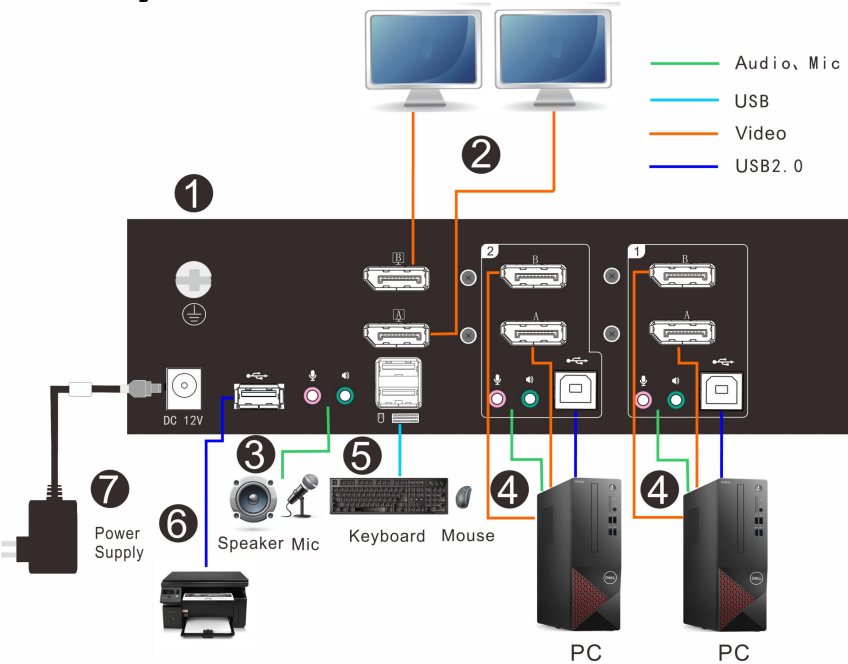

4.Mouse Switching

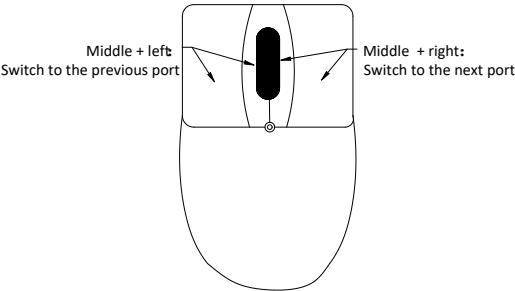

Mouse Switching	Middle button + left button	Switch to the previous port
	Middle button + right button	Switch to the next port

5.Hotkey Operation

The DM series provides a wealth of hotkey functions to control and configure the device using the keyboard.

Press [Scroll Lock] twice continuously (within 2S interval) to enter the keyboard hotkey mode. If no key is pressed within two seconds in the keyboard hotkey mode, the keyboard will exit the hotkey operation mode.

The hotkey commands are as follows: [Scroll Lock] twice + the corresponding key for each function.

Function	Hotkey	Description
Port Switching	+ 【1~2】	Switch the port according to the set switching mode, for example: [Scroll Lock] + [Scroll Lock] + [2] ---> Quickly switch to port 2
	+ 【↑ / ↓】	Continuously switch to the previous or next port according to the set switching mode
Auto scan	+ 【S】	Invokes Auto Scan. The KVM focus cycles from port to port at 5 second intervals. Press any key on the keyboard to exit the automatic scan. The automatic scan time is 5-99s, move the mouse to extend the scan time
Set auto scan interval	+ 【T】 + 【0~9】 + 【Enter】	Set the automatic scan interval (5-99s).
Hotkey cycle	+ 【F】	Hotkey Cycle Mode (Scroll Lock→L_Ctrl→ Scroll Lock)
Mouse Switching	+ 【W】	Enable/disable mouse switching
Audio lock/unlock	+ 【A】	Lock the audio focus on the current port, press this hotkey again to unlock
USB HUB lock/unlock	+ 【U】	Lock the USB HUB on the current port, press this hotkey again to unlock

6.Specifications

Model		KVM-0201	
Computer Connections		2	
Port Selection		Pushbutton; Hotkey; Mouse	
Connectors	Console	Monitor	2 * DisplayPort
		Keyboard/mouse	2 * USB type A （White）
		Microphone (Pink)	1* 3.5mm Audio Jack
		Speaker (Green)	1 * 3.5mm Audio Jack
	KVM	Video input	4 * DisplayPort
		USB input	2 * USB2.0 type B （White）
		Microphone (Pink)	2 * 3.5mm Audio Jack
		Speaker (Green)	2 * 3.5mm Audio Jack
	USB2.0 port		1 * USB type A （White）
	Switch	Menu selection	3 * Buttons
LED	Audio Mic	3 * (Green)	
	KVM	3 * (Green)	
	USB	3 * (Green)	
I/R Value		12V/ 2A	
Video Resolution		4096×2160@60Hz(4K DCI/60Hz) 3840×2160@60Hz(4K UHD/60Hz)	
Power Consumption		4W	
Environmental Requirement	Operating Temperature		0-50℃
	Storage Temperature		-20-60℃
	Humidity		0-80%RH,Non-condensing
Physical Features	Material		Metal
	Net Weight		1kg
	Product Dimension (W×D× H)		210mmx 109.2mm x 66mm
	Package Dimension (W×D× H)		395mm x 274mm x 110mm

7. Frequently Asked Questions

No.	Issue	Solution
1	No display	Check whether the port indicator on the front panel of the device is on.
		Check whether the USB cable is connected (USB-B connects to the KVM switch, USB-A connects to the PC host).
		Check whether the monitor is connected to the KVM switch.
		Check whether the monitor and the PC host are powered-on, and the monitor is directly connected to the PC host.
2	No mouse and keyboard	Check whether the USB cable and the DP signal cable are connected to the same PC host.
		Unplug all the USB cables of port 1 and port 2 respectively and reconnect them one by one.
		If you are using a mechanical mouse and keyboard or a mouse with macros, please connect to the USB 2.0 port.
		Check whether the audio cable, microphone cable, and DP signal cable are connected to the same PC host.
3	No audio microphone	Ensure that the audio and microphone devices are powered-on.
		Check whether the audio and microphone devices are connected to the KVM switch properly.
		Check whether the sound card of the PC host has recognized the audio and microphone equipment.
4	Display video is flashing	Check whether the DP signal cables at both ends of the KVM are connected properly. It is recommended that the total length of the cable from the signal source to the display does not exceed 3.3 meters, if it exceeds 3.3 meters, a high-quality signal cable must be connected.