

A solid red circle positioned to the left of the title text.

FMU-MC09 Data Sheet

Contents

Product Overview 3

Features and Benefits 4

Front Panel and Port Description 4

Application 5

Fiber Loss 5

Technical Specification 6

ITU Channel Guiding 8

High Quality CWDM Transceivers to Build a Passive CWDM System 8

Layout and Dimension 8

Ordering Information 9

Product Overview

The 9CH Mux Demux, based on Free Space technology, is a passive CWDM device featuring high density, low loss, and long-haul transmission suitability. This unit can be used as either a multiplexer or de-multiplexer (Mux/Demux). It combines 9-channels of CWDM wavelengths into a composite signal and separates the combined CWDM signal into 9-channels individual wavelengths over a single-mode optical fiber. In accordance with the ITU-T G.694.2, it maximizes the capacity of the C-band range. Designed for maximum configuration flexibility, the CWDM Mux Demux can plug directly into the FMU chassis, each module occupying one slot. Moreover, because single fiber Mux/Demux is always used in pairs, this device needs to be used in conjunction with the FMU-MC09B.

It supports 1G/10G/25G Ethernet, SDH/SONET, 16/8/4/2/1G Fibre Channel, FTTx and CATV. When deployed with FS CWDM optical transceivers, OEO and OADM modules, it seamlessly enables flexible network architectures ranging from simple point-to-point connections to amplified ring configurations.



Features and Benefits

- Multiplexing of up to 9 Channels on Single Fiber to Maximize the Using of Existing Fiber
- Compatible with ITU Grid and Interconnects with Optical Networking Products
- Hybrid C/DWDM System via 1530nm/1550nm for Additional DWDM Channels
- Enables Space-efficient Integration and Hybrid Deployment of CWDM, DWDM and LANWDM within the FMU Chassis
- Passive Transparent Multiplexing at Any Rate, Any Service, Including Ethernet, SDH/SONET, Fiber Channel, FTTx, and CATV
- Suitable for Short Distance Transmission, Commonly Used in Small and Medium-sized Networks
- The Solution Can be [Customized](#) per Customer Application Requirements
- Fit into One Slot of the [FMU 2-Slot 1U 19" Rack Chassis](#)

Front Panel and Port Description




LINE


Line interface for common signal

Application

By using the expansion port, 1530nm and 1550nm CWDM channels, it becomes possible to transmit multiple DWDM channels within a single CWDM channel, providing a solution that is both cost-effective and easily expandable.

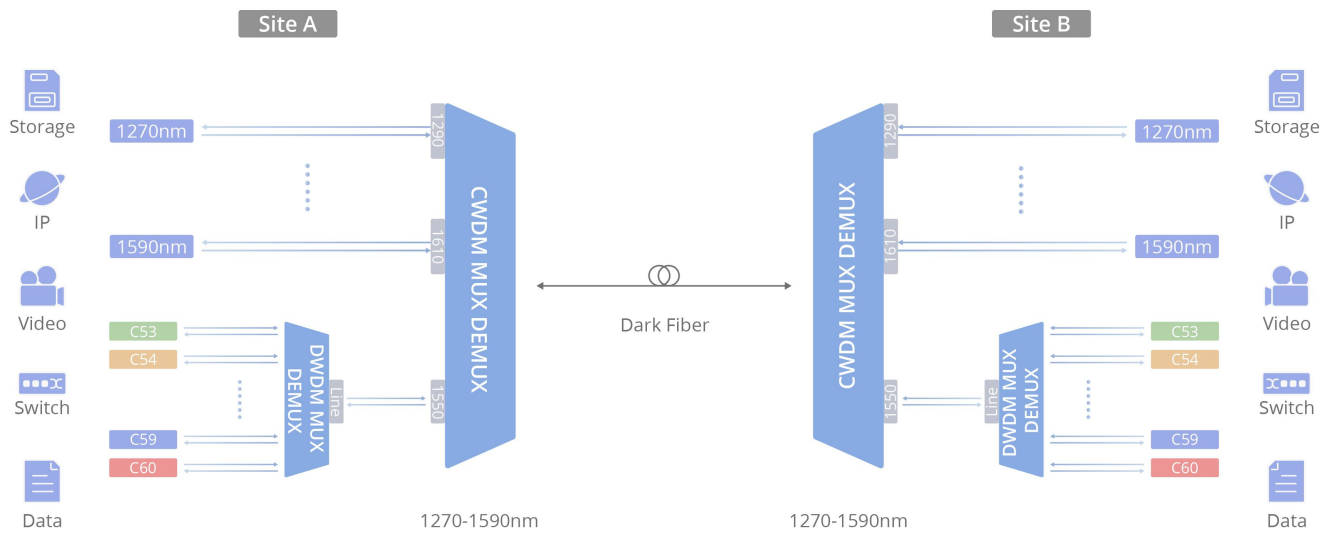

Fiber Loss

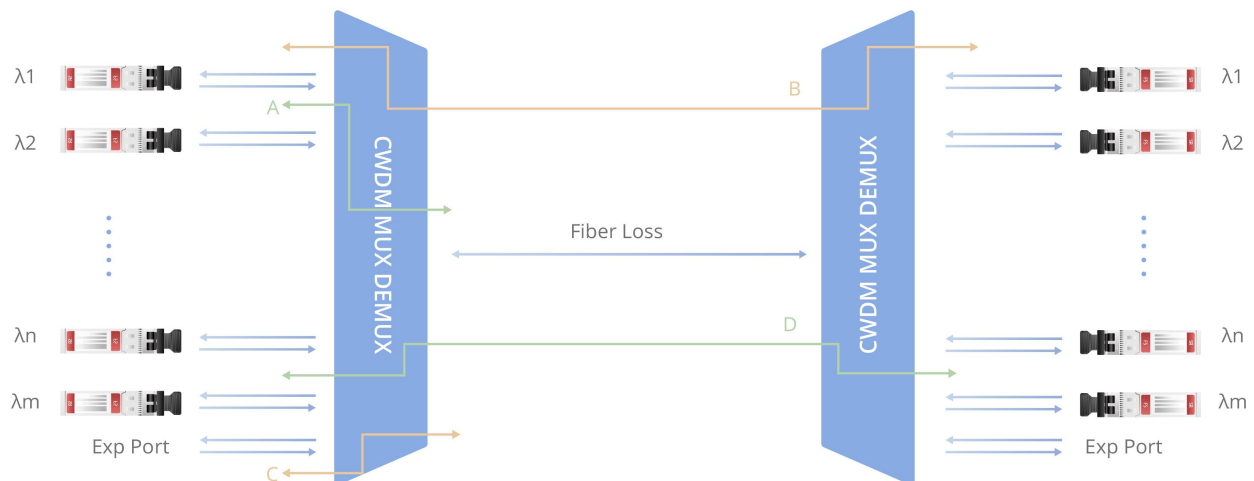

Technical Specification

Parameter	Value
Channel	8 Channels
Wavelength	TX-1290-1610nm, RX-1270-1590nm
Connector	LC/UPC
Single/Dual Fiber	Single Fiber
Insertion Loss	≤ 2.6dB, 2.4dB Typical
Passband Ripple	≤0.5dB
Channel Passband	± 6.5nm
Technology	Free Space
Channel Spacing	20nm
Adjacent Channel Isolation	≥30dB
Non-adjacent Channel Isolation	≥40dB
Return Loss	≥45dB
Directivity	≥45dB

Parameter	Value
Polarization Dependent Loss	≤0.3dB
Polarization Mode Dispersion	≤0.1ps
Max Optical Power	≤500mW (27dBm)
Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)
Fiber Type	G657 A1
Rack Space	1U ½-width Plug-in Module
Housing	Pluggable Module (Occupies 1 Slot in FMU Chassis)
Dimensions	1.73"x8.35"x10.04" (44x212x255mm)

Notes: 1.Specified with connectors andadapters.

ITU Channel Guiding

ITU Channel No.	27	29	31	33	35	37	39	41	43	45	47	49	51	53	55	57	59	61
Wavelength (nm)	1270	1290	1310	1330	1350	1370	1390	1410	1430	1450	1470	1490	1510	1530	1550	1570	1590	1610

High Quality CWDM Transceivers to Build a Passive CWDM System

FS.COM offers CWDM transceiver modules in SFP, SFP+, SFP28, 3G-SDI SFP and XFP formats. Every optics is tested in real switches and fully compatible with Cisco, Juniper, Arista, Brocade, Dell, Extreme, etc.

Transmission distance range from 10-80km, transmission data rate range from 1G-25G speeds, without the use of optical amplifiers.



CWDM-SFP



CWDM-10G SFP+



CWDM-25G SFP28




CWDM-3G-SDI-SFP



CWDM-XFP

Layout and Dimension

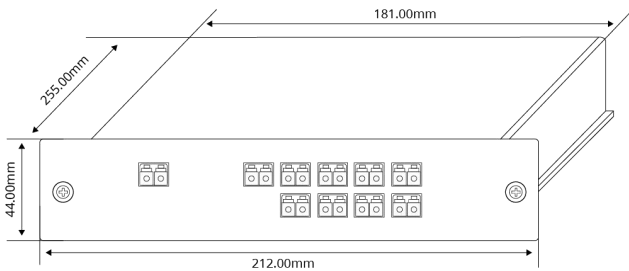

Width: 212.00mm (8.35")
Height: 44.00mm (1.73")
Depth: 255.00mm (10.04")



2-slot FMU managed chassis, supports up to 2 DWDM Mux Demux or CWDM Mux Demux modules with different channels in FMU packages.
Width: 18.97" (481.8mm)
Height: 1.73" (44mm)
Depth: 10.28" (261.2mm)
Mux Demux plug-in module occupies one slot.

Ordering Information

Mux Demux &OADM

FMU Series
Mux Demux

FMU-MC045561ES	4 Channels CWDM Mux or Demux, 1550-1610nm, with Expansion Port, 1.5dB Typical IL, LC/UPC, Single Fiber, FMU Plug-in Module#214979
FMU-MC163161EMS	16 Channels CWDM Mux or Demux, 1310-1610nm, with Monitor and Expansion Port, 4.5dB Typical IL, LC/UPC, Single Fiber, FMU Plug-in Module#214981
FMU-MC082759EMA	8 Channels CWDM Mux Demux, 1270-1590nm, with Monitor and Expansion Port, 4.5dB Typical IL, LC/UPC, Single Fiber, Side A, FMU Plug-in Module#214983
FMU-MC082961EMB	8 Channels CWDM Mux Demux, 1290-1610nm, with Monitor and Expansion Port, 4.5dB Typical IL, LC/UPC, Single Fiber, Side B, FMU Plug-in Module#214985
FMU-C182761M	18 Channels CWDM Mux Demux, 1270-1610nm, with Monitor Port, 5.0dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#33489
FMU-MC082745	8 Channels CWDM Mux Demux, 1270-1450nm (Skip 1390, 1410nm), 2.5dB Typical IL, LC/UPC, Dual Fiber, FMU Plug-in Module#42937
FMU-MC042733	4 Channels CWDM Mux Demux, 1270-1330nm, 1.0dB Typical IL, LC/UPC, Dual Fiber, FMU Plug-in Module#42972
FMU-MC09B	9 Channels CWDM Mux Demux, 1290-1610nm, 2.4dB Typical IL, LC/UPC, Single Fiber, Side-B, FMU Plug-in Module#43699
FMU-MC09A	9 Channels CWDM Mux Demux, 1270-1590nm, 2.4dB Typical IL, LC/UPC, Single Fiber, Side-A, FMU Plug-in Module#43711
FMU-MC084761EM	8 Channels CWDM Mux Demux, 1470-1610nm, with Monitor and Expansion Port, 2.0dB Typical IL, LC/UPC, Dual Fiber, FMU Plug-in Module#78163
FMU-C182761M	18 Channels CWDM Mux Demux, 1270-1610nm, with Monitor Port, 2.2dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#123533
FMU-D60OCMW5	60 Odd Channels DWDM Mux Demux, Super C-band 100GHz 1524.50-1571.65nm, with Monitor Port, 6.0dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#166000
FMU-D60ECMW5	60 Even Channels DWDM Mux Demux, Super C-band 100GHz 1524.89-1572.06nm, with Monitor Port, 6.0dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#166001
FMU-D40ODMW5	40 Odd Channels Super C-band 150GHz 190.7875-196.6375THz, with Monitor Port, 5.5dB Typical IL, LC/UPC, Dual Fiber DWDM Mux Demux, 1U Rack Mount#166002
FMU-D40_EDMW5	40 Even Channels Super C-band 150GHz 190.7125-196.5625THz, with Monitor Port, 5.5dB Typical IL, LC/UPC, Dual Fiber DWDM Mux Demux, 1U Rack Mount#166003
FMU-D64BMW5	64 Channels DWDM Mux Demux, Super C-band 75GHz 1528.87-1566.62nm, with Monitor Port, 5.8dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#166004
FMU-MD082128EMS	8 Channels DWDM Mux or Demux, 100GHz C21-C28, with Monitor and Expansion Port, 2.75dB Typical IL, LC/UPC, Single Fiber, FMU Plug-in Module#214969
FMU-MD042124EMA	4 Channels DWDM Mux Demux, 100GHz C21-C24, with Monitor and Expansion Port, 2.75dB Typical IL, LC/UPC, Single Fiber, Side A, FMU Plug-in Module#214971
FMU-MD045760EMB	4 Channels DWDM Mux Demux, 100GHz C57-C60, with Monitor and Expansion Port, 2.75dB Typical IL, LC/UPC, Single Fiber, Side B, FMU Plug-in Module#214973
FMU-MD042023EMD	4 Channels DWDM Mux Demux, 100GHz C20-C23, with Monitor and Expansion Port, 1.6dB Typical IL, LC/UPC, Dual Fiber, FMU Plug-in Module#214975

Mux Demux & OADM		
	FMU-D402160M3	40 Channels DWDM Mux Demux, 100GHz C21-C60, with 1310nm and Monitor Port, 3.5dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#35887
	FMU-D162136EM3	16 Channels DWDM Mux Demux, 100GHz C21-C36, with Monitor, Expansion and 1310nm Port, 4.4dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#72430
	FMU-D162136A	16 Channels DWDM Mux Demux, 100GHz C21-C36, 4.0dB Typical IL, LC/UPC, Single Fiber, Side-A, 1U Rack Mount#78535
	FMU-D164560B	16 Channels DWDM Mux Demux, 100GHz C45-C60, 4.0dB Typical IL, LC/UPC, Single Fiber, Side-B, 1U Rack Mount#78536
	FMU-FD402160M3	40 Channels DWDM Mux Demux, 100GHz C21-C60, with 1310nm Port and Monitor Port, 4.5dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#84492
	FMU-MD085360E	8 Channels DWDM Mux Demux, C53-C60, with Expansion Port, 2.8dB Typical IL, LC/UPC, Dual Fiber, FMU Plug-in Module, CWDM/DWDM Hybrid Solution#30568
	FMU-D402160M	40 Channels DWDM Mux Demux, 100GHz C21-C60, with Monitor Port, 3.0dB Typical IL, LC/UPC, Dual Fiber, 1U Rack Mount#33485
	FMU-MD08_EB	8 Channels DWDM Mux Demux, 100GHz C22-C36, with Expansion Port, 4.2dB Typical IL, LC/UPC, Single Fiber, Side-B, FMU Plug-in Module#50116
	FMU-MD08_EA	8 Channels DWDM Mux Demux, 100GHz C21-C35, with Expansion Port, 4.2dB Typical IL, LC/UPC, Single Fiber, Side-A, FMU Plug-in Module#50117
	FMU-MD085360EM3	8 Channels DWDM Mux Demux, 100GHz C53-C60, with Monitor, Expansion and 1310nm Port, 3.0dB Typical IL, LC/UPC, Dual Fiber, FMU Plug-in Module, CWDM/DWDM Hybrid Solution#72433
Custom Mux Demux	FMU-L042728B	4 Channels 1273.55-1286.66nm, Single Fiber LAN-WDM Mux Demux, Side-B, FMU Plug-in Module, LC/UPC#244655
	FMU-L042930A	4 Channels 1295.56-1309.14nm, Single Fiber LAN-WDM Mux Demux, Side-A, FMU Plug-in Module, LC/UPC#244657
	MUX-DWDM	Customized Dual and Single Fiber DWDM Mux Demux#322911
	MUX-CWDM	Customized Dual and Single Fiber CWDM Mux Demux#70410
OADM	MUX-CCWDM	Customized Dual and Single Fiber Compact CWDM Mux Demux#73961
	DOADM-EAW	Customized Dual and Single Fiber DWDM OADM, East and West#70427
	DOADM-EOW	Customized Dual and Single Fiber DWDM OADM, East or West#73795
	COADM-EAW	Customized Dual and Single Fiber CWDM OADM, East and West#70425
Chassis	COADM-EOW	Customized Dual and Single Fiber CWDM OADM, East or West#73794
	FMU-1UFMX-N	FMU 2-Slot 1U 19" Rack Chassis Unloaded, Holds up to 2 Units FMU Plug-in Module#30408

TRANSPONDERS & MUXPONDERS

	FMT4DL-OEO25GSFP28	FMT4DL-OEO25GSFP28, 4 Channels 25G WDM Transponder (Converter) for FMT Managed Chassis, 8 SFP28/SFP+ Slots#92056
10G	FMT4DL-OEO10GSFP	FMT4DL-OEO10GSFP, 4 Channels WDM Transponder (Converter) for FMT Managed Chassis, 8 SFP/SFP+ Slots#30515
	FMT04-CH1U	FMT04-CH1U, 4 Slots 1U Managed Chassis Unloaded Platform, Redundant AC PSUs, Support SNMP V1 Network Management#39214
Chassis	FMTCH	FMT-CH, Customized 4/8/16 Slots 1U/2U/4U Managed Chassis Unloaded Platform, Redundant AC/DC PSUs, Support SNMP Network Management#70413

WDMTRANSCEIVERS

100G/200G CFP2	CFP2-DCO-200G-M	C14 1566.31nm CFP2-DCO 100G/200G DWDM C-band Tunable 96Chs ITU CH13-CH60 50GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#120128
25G SFP28	DW-SFP25G10-17	Cisco C17 DWDM-SFP25G-63.86 Compatible SFP28 25G DWDM 1563.86nm 100GHz 10km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#87000
	CW-SFP25G30-27	Cisco CWDM-SFP25G-1270-30 Compatible SFP28 25G CWDM 1270nm 30km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#100112
	CW-SFP25G10-27	Cisco CWDM-SFP25G-1270-10 Compatible SFP28 25G CWDM 1270nm 10km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#76003
10G SFP+	LW-SFP25G40-86	Cisco LWDM-SFP25G-86.66 Compatible SFP28 25G LWDM 1286.66nm 40km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#93786
	DW-SFP10G80-21-I	Cisco C21 DWDM-SFP10G-60.61-I Compatible SFP+ 10G DWDM 1560.61nm 100GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission (Industrial)#113562
	DW-SFP10G40-21-I	Cisco C21 DWDM-SFP10G-60.61-I Compatible SFP+ 10G DWDM 1560.61nm 100GHz 40km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission (Industrial)#113511
1GSFP	CW-SFP10G80-47	Cisco CWDM-SFP10G-1470 Compatible SFP+ 10G CWDM 1470nm 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#19367
	CW-SFP10G40-27-I	Cisco CWDM-SFP10G-1270-I Compatible SFP+ 10G CWDM 1270nm 40km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission (Industrial)#112392
	DWDM-SFP1G-EZX	Cisco C17 DWDM-SFP-6386 Compatible SFP 1000BASE-DWDM 1563.86nm 100GHz 100km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#54150
	DWDM-SFP1G-ZX	Cisco C17 DWDM-SFP-6386-80 Compatible SFP 1000BASE-DWDM 1563.86nm 100GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#47697
	CWDM-SFP1G-ZX	Cisco CWDM-SFP-1270 Compatible SFP 1000BASE-CWDM 1270nm 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#33234
	DWDM-SFP1G-ZX	Cisco C17 DWDM-SFP-6386-80 Compatible SFP 1000BASE-DWDM 1563.86nm 100GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#47697
	CWDM-SFP1G-ZX	Cisco CWDM-SFP-1270 Compatible SFP 1000BASE-CWDM 1270nm 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#33234

*Standard products are listed above. Customized specifications are available upon request.



Delaware, United States

Address: Delaware: 380 Centerpoint Blvd, New Castle, DE 19720, United States
Email: US@fs.com
Tel: +1 (888) 468-9910

Germany

Address: Röntgenstraße 18, 85757 Karlsfeld, Germany
Email: DE@fs.com
Tel: +49 (0) 8131 377 3008

Australia

Address: 57-59 Edison Rd, Dandenong South, VIC 3175, Australia
Email: AU@fs.com
Tel: +61 3 5909 9990

Japan

Address: JS Progress Building 5F, 4-1-23, Heiwajima, Ota Ku, Tokyo, 143-0006, Japan
Email: JP@fs.com
Tel: +81-3-6897-9438

California, United States

Address: California: 15241 Don Julian Rd, City of Industry, CA 91745, United States
Email: US@fs.com
Tel: +1 (888) 468-9910

United Kingdom

Address: Unit 8, Urban Express Park, Union Way, Aston, Birmingham B6 7FH, United Kingdom
Email: UK@fs.com
Tel: +44 (0) 121 726 4775

Singapore

Address: 7002 ANG MO KIO AVENUE 5 #05-02 Singapore 569914
Email: SG@fs.com
Tel: +65 31381992



FS has several offices around the world. Addresses, phone numbers are listed on the FS Website at https://www.fs.com/contact_us.html. FS and FS logo are trademarks or registered trademarks of FS in the U.S. and other countries.