

Transceiver Reliability TEST Report

Model name : SFP-25GER-31-I

Table of Contents

1. Introduction	1
2. Purpose	1
3. Sample Description	1
4. Procedure	2
4.1 Sampling	2
4.2 Sample Grouping and Test Sequence	2
4.3 Failure Criterion	3
4.4 Test Plan and Status	4
5. Test Results	4
5.1 O/E Characteristic	4
5.2 Physical Dimensions	5
5.3 Low Temperature Storage	7
5.4 Temperature Cycle	9
5.5 Mechanical Shock /Vibration	11
5.6 High Temperature Storage	13
5.7 Damp Heat	15
5.8 ESD Threshold	17
5.9 ESD Immunity	18
5.10 Visual Inspection	19
5.11 Power Temperature Cycling Test	19
5.12 Powered Damp Heat Test	22
5.13 Accelerating Aging	23

1. Introduction

This report presents the reliability test results for 1300nm EML DFB laser based 25 Gb/s SFP28 , EML TOSA w/TEC and APD ROSA transceiver.

2. Purpose

The purpose of the test is to determine whether the O/E characteristics, mechanical integrity and endurance of 25 Gb/s SFP28 ER 30/40km transceiver module meet the requirement of reliability.

3. Sample Description

The sample transmits and receives optical data up to 30/40km over single mode fiber. The module' s specification should fit the data in Table 1.

Table 1: Specification

Parameter	Symbol	Specification			Unit
		Min.	Typ.	Max	
Operating Voltage	V_{CC}	3.135	3.3	3.465	V
Center Wavelength Range	λ_c	1295		1310	nm
Launch Optical Power	P_O	-1		+5	dBm
Extinction Ratio	EX	4.0			dB
Receiver OMA Sensitivity(@25.78Gb/s) (BER=5-5)	S			-19	dBm
Operating Temperature Range	T_C	-40	-	+85	°C
Storage Temperature Range	T_S	-40	-	+85	°C

4. Procedure

4.1 Sampling

All the samples are selected randomly from storeroom.

4.2 Sample Grouping and Test Sequence

Table 2: Sample Grouping and Test Sequence

Test Sequence	O/E Characteristics	
	Group 1	Physical Dimensions Low-temperature Storage Mechanical Shock/Vibration Temperature Cycle Damp Heat High-Temperature Storage ESD Threshold ESD Immunity Visual Inspection
	Group 2	Temperature Cycle (Powered) Damp Heat Accelerating Aging

4.3 Failure Criterion

Table 3: Failure Criterion

Heading	Test Program	Failure Criteria
Functional Verification	O/E Characteristics	Any key parameter is out of the specification Table 1.
	Visual Inspection	
	Physical Dimensions	
Mechanical Endurance	Mechanical Shock/Vibration	1. Any key parameter is out of the specification Table 1. 2. $ \Delta S > 1.0\text{dB}$ 3. $ \Delta P > 1.0\text{dB}$
Environmental Endurance	Temperature Cycle	
	Damp Heat	
	Damp Heat(Power)	
	Low-Temperature Storage	
	High-Temperature Storage	
	Accelerating Aging	
Special Tests	ESD Immunity	
	ESD Threshold	

4.4 Test Plan and Status

Table 4: Test Plan and Status

Test	Reference	Condition	SS/C	Status
O/E Characteristics	Specifications	Specifications	22/0	Passed
Mechanic Shock	MIL-STD-883	1500g, 0.5ms, 5times/axis	11/0	Passed
Vibration	MIL-STD-883	20g,20-2000Hz, 4minutes/cycle, 4cycles/axis	11/0	Passed
Accelerating Aging	GR-468-CORE	85°C,3.3V, >2000hrs	11/0	2064hrs
Low-Temp Storage	GR-468-CORE	-40°C, 72hrs	11/0	Passed
High-Temperature Storage	GR-468-CORE	85°C, 2000hrs	11/0	Passed
Temperature Cycle	GR-468-CORE	-40°C to 85°C, 500 cycles	11/0	Passed
Damp Heat	MIL-STD-202	85°C,85%RH, 1000 hrs	11/0	Passed
Damp Heat Powered	GR-468-CORE	85°C,85%RH, 1000 hrs	11/0	Passed
Temperature Cycle (Powered)		-40°C to 85°C, 500 cycles	11/0	Passed
ESD Immunity	IEC61000-4-2	4 Class, air discharge 15KV, contact discharge 8KV	3/0	Passed
ESD Threshold	MIL-STD-883	HBM, least 500V, three positive pulses, three negative pulses, test to failure. (Signal Pin)	6/0	±1000V
Physical Dimensions	MIL-STD-883	Micrometers, calipers, gauges, contour projectors	11/0	Passed
Visual Inspection	MIL-STD-883,	1.5X to 10X(Devices)	11/0	Passed

5. Test Results

5.1 O/E Characteristic

Table 5: Optical/Electrical Characterization of Twenty-Two Modules

No.	P ₀ (dBm)	Sensitivity (dBm)	No.	P ₀ (dBm)	Sensitivity (dBm)
1	0.6	-25	12	0.6	-25
2	1.6	-24.6	13	1.4	-24.2
3	1.8	-24.4	14	0.7	-23.2
4	1.2	-25.6	15	0.7	-25.5
5	0.8	-22.8	16	0.5	-22.4
6	0.6	-24.2	17	0.7	-24.3
7	1.2	-24.3	18	0.6	-24.1
8	1.1	-23.5	19	1.8	-24.7
9	1.1	-25.6	20	0.7	-25.9
10	0.7	-24.5	21	0.9	-23.9
11	1.2	-25	22	0.9	-25.5

5.2 Physical Dimensions

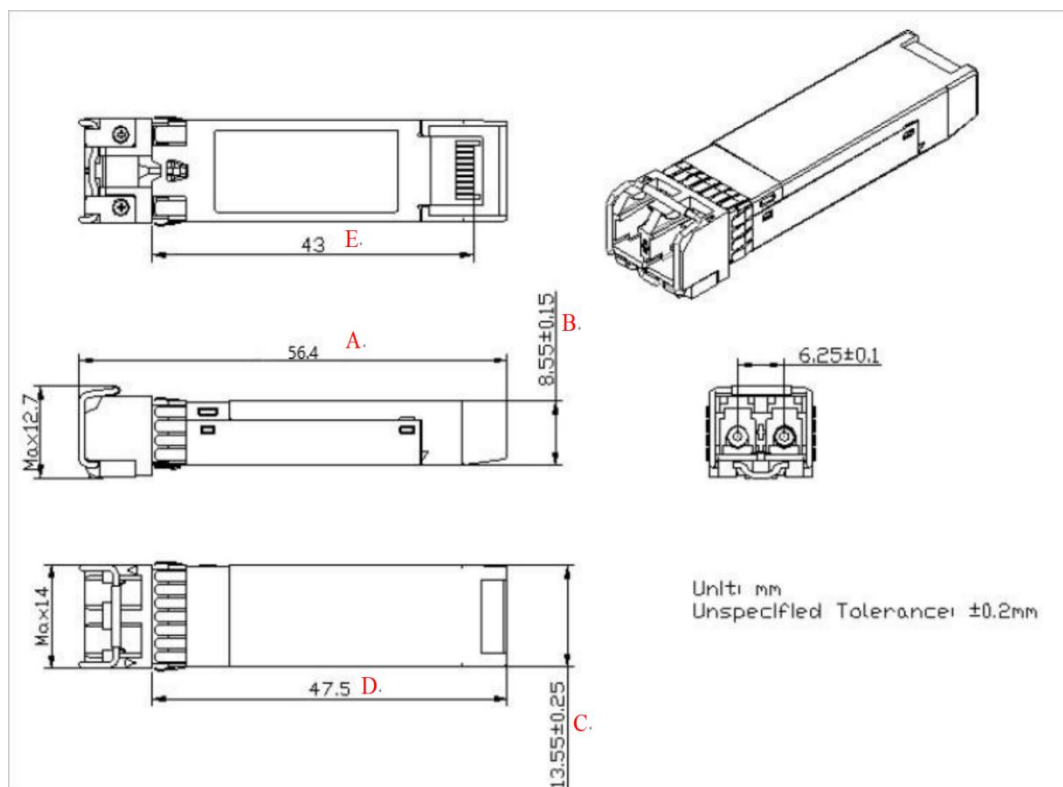


Figure 1: Package Outline(unit: mm)

Table 6: Data of Dimension Test(unit: mm)

Projected Dimension	Designator				
	A	B	C	D	E
	56.4±0.2	8.55±0.15	13.55±0.25	47.5±0.2	43±0.2
1	56.46	8.52	13.58	47.48	43.08
2	56.45	8.58	13.59	47.45	43.09
3	56.34	8.59	13.52	47.47	42.88
4	56.35	8.53	13.53	47.48	42.91
5	56.33	8.51	13.54	47.53	42.93
6	56.36	8.52	13.51	47.52	42.97
7	56.35	8.58	13.52	47.46	42.93
8	56.35	8.50	13.50	47.50	43.03
9	56.33	8.59	13.53	47.44	43.04
10	56.37	8.52	13.57	47.49	42.89
11	56.36	8.59	13.59	47.52	42.94
Statistics					
AVE	56.36	8.55	13.54	47.49	42.97
SD	0.04	0.04	0.03	0.03	0.07
MAX	56.46	8.59	13.59	47.53	43.09
MIN	56.33	8.50	13.50	47.44	42.88

5.3 Low Temperature Storage

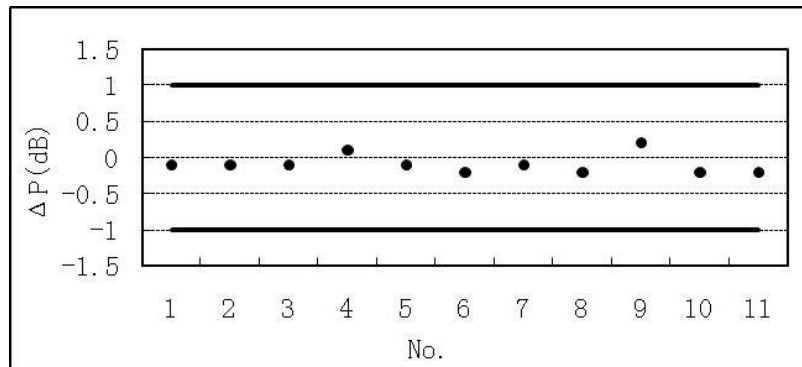


Figure 2: Optical Power Variation in Low Temperature Storage Test

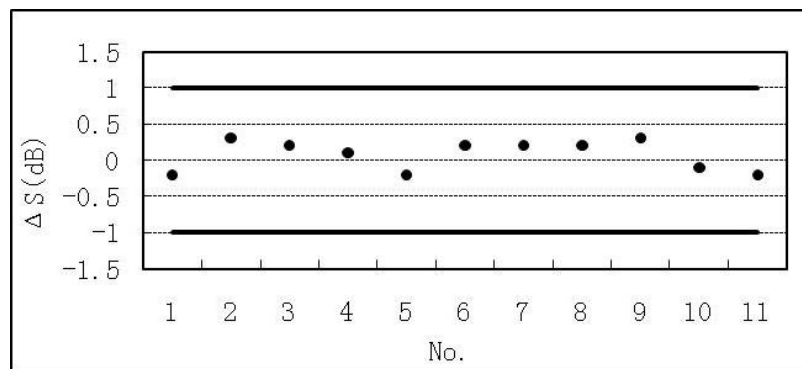


Figure 3: Receiver Sensitivity Variation in Low Temperature Storage Test

Table 7: Data of Low Temperature Storage Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP _o (dB)	ΔS (dB)
1	0.6	-25.0	0.5	-25.2	-0.1	-0.2
2	1.6	-24.6	1.5	-24.3	-0.1	0.3
3	1.8	-24.4	1.7	-24.2	-0.1	0.2
4	1.2	-25.6	1.3	-25.5	0.1	0.1
5	0.8	-22.8	0.7	-23.0	-0.1	-0.2
6	0.6	-24.2	0.4	-24.0	-0.2	0.2
7	1.2	-24.3	1.1	-24.1	-0.1	0.2
8	1.1	-23.5	0.9	-23.3	-0.2	0.2

9	1.1	-25.6	1.3	-25.3	0.2	0.3
10	0.7	-24.5	0.5	-24.6	-0.2	-0.1
11	1.2	-25.0	1.0	-25.2	-0.2	-0.2
Statistics						
AVE	1.08	-24.50	0.99	-24.43	-0.09	0.07
SD	0.37	0.80	0.41	0.79	0.12	0.20
MAX	1.80	-22.80	1.70	-23.00	0.20	0.30
MIN	0.60	-25.60	0.40	-25.50	-0.20	-0.20

5.4 Temperature Cycle

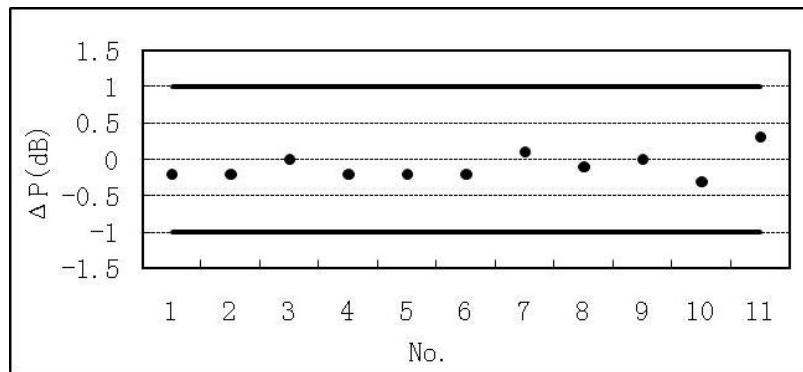


Figure 4: Optical Power Variation in Temperature Cycle Test

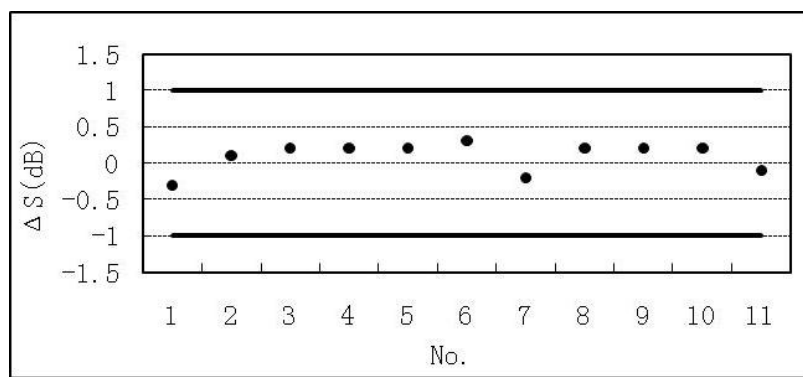


Figure 5: Receive Sensitivity Variation in Temperature Cycle Test

Table 8: Data of Temperature Cycle Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP_o (dB)	ΔS (dB)
1	0.5	-25.2	0.3	-25.5	-0.2	-0.3
2	1.5	-24.3	1.3	-24.2	-0.2	0.1
3	1.7	-24.2	1.7	-24.0	0.0	0.2
4	1.3	-25.5	1.1	-25.3	-0.2	0.2
5	0.7	-23.0	0.5	-22.8	-0.2	0.2
6	0.4	-24.0	0.2	-23.7	-0.2	0.3
7	1.1	-24.1	1.2	-24.3	0.1	-0.2
8	0.9	-23.3	0.8	-23.1	-0.1	0.2
9	1.3	-25.3	1.3	-25.1	0.0	0.2
10	0.5	-24.6	0.2	-24.4	-0.3	0.2
11	1.0	-25.2	1.3	-25.3	0.3	-0.1
Statistics						
AVE	0.99	-24.43	0.90	-24.34	-0.09	0.09
SD	0.41	0.79	0.50	0.86	0.17	0.19
MAX	1.70	-23.00	1.70	-22.80	0.30	0.30
MIN	0.40	-25.50	0.20	-25.50	-0.30	-0.30

5.5 Mechanical Shock /Vibration

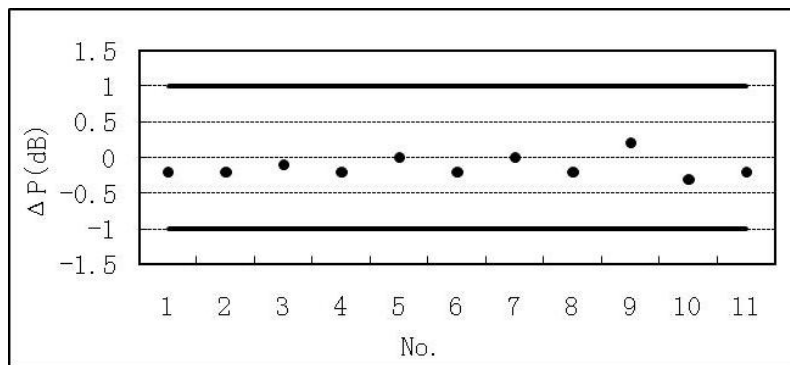


Figure 6: Optical Power Variation in Mechanical Shock /Vibration Test

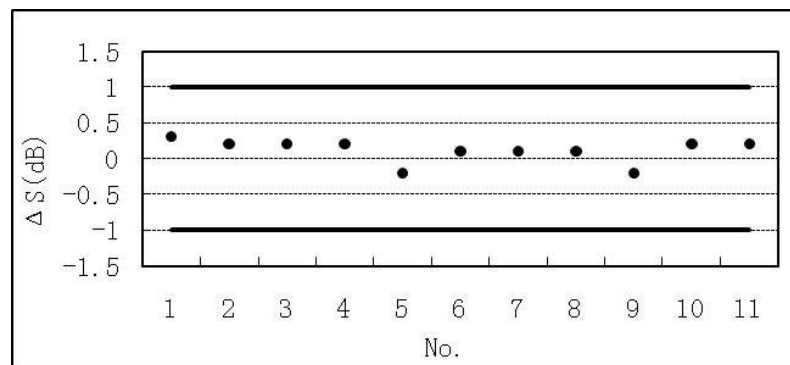


Figure 7: Receiver Sensitivity Variation in Mechanical Shock /Vibration Test

Table 9: Data of Mechanical Shock /Vibration Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP_o (dB)	ΔS (dB)
1	0.3	-25.5	0.1	-25.2	-0.2	0.3
2	1.3	-24.2	1.1	-24.0	-0.2	0.2
3	1.7	-24.0	1.6	-23.8	-0.1	0.2
4	1.1	-25.3	0.9	-25.1	-0.2	0.2
5	0.5	-22.8	0.5	-23.0	0.0	-0.2
6	0.2	-23.7	0.0	-23.6	-0.2	0.1
7	1.2	-24.3	1.2	-24.2	0.0	0.1
8	0.8	-23.1	0.6	-23.0	-0.2	0.1
9	1.3	-25.1	1.5	-25.3	0.2	-0.2
10	0.2	-24.4	-0.1	-24.2	-0.3	0.2
11	1.3	-25.3	1.1	-25.1	-0.2	0.2
Statistics						
AVE	0.90	-24.34	0.77	-24.23	-0.13	0.11
SD	0.50	0.86	0.57	0.81	0.14	0.16
MAX	1.70	-22.80	1.60	-23.00	0.20	0.30
MIN	0.20	-25.50	-0.10	-25.30	-0.30	-0.20

5.6 High Temperature Storage

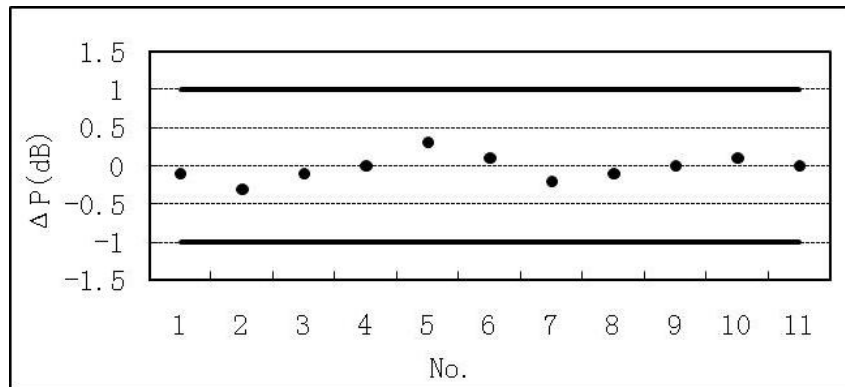


Figure 8: Optical Power Variation in High Temperature Storage Test

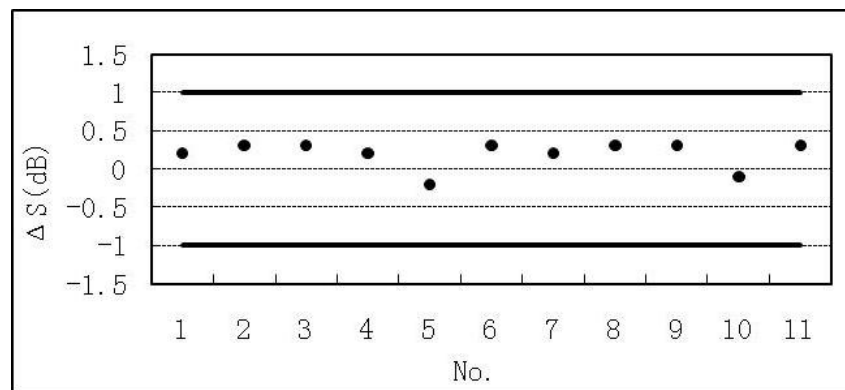


Figure 9: Receiver Sensitivity Variation in High Temperature Storage Test

Table 10: Data of High Temperature Storage Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP_o (dB)	ΔS (dB)
1	0.1	-25.2	0.0	-25.0	-0.1	0.2
2	1.1	-24.0	0.8	-23.7	-0.3	0.3
3	1.6	-23.8	1.5	-23.5	-0.1	0.3
4	0.9	-25.1	0.9	-24.9	0.0	0.2
5	0.5	-23.0	0.8	-23.2	0.3	-0.2
6	0.0	-23.6	0.1	-23.3	0.1	0.3
7	1.2	-24.2	1.0	-24.0	-0.2	0.2
8	0.6	-23.0	0.5	-22.7	-0.1	0.3
9	1.5	-25.3	1.5	-25.0	0.0	0.3
10	-0.1	-24.2	0	-24.3	0.1	-0.1
11	1.1	-25.1	1.1	-24.8	0.0	0.3
Statistics						
AVE	0.77	-24.23	0.75	-24.04	-0.03	0.19
SD	0.57	0.81	0.52	0.78	0.15	0.17
MAX	1.60	-23.00	1.50	-22.70	0.30	0.30
MIN	-0.10	-25.30	0.00	-25.00	-0.30	-0.20

5.7 Damp Heat

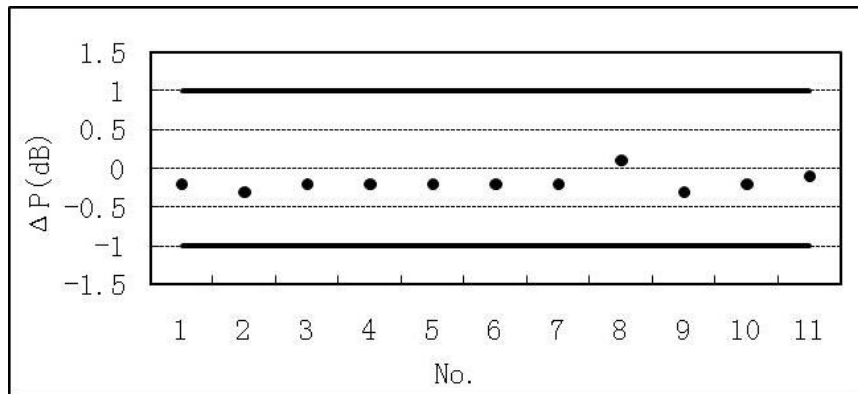


Figure 10: Optical Power Variation in ESD Threshold Test

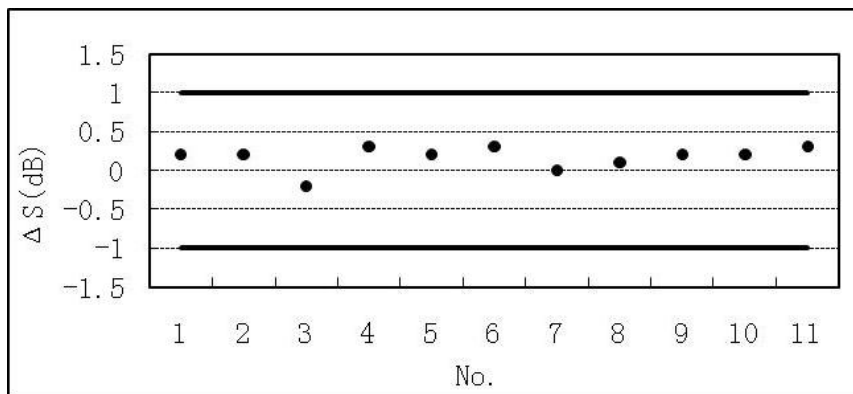


Figure 11: Receiver Sensitivity Variation in ESD Threshold Test

Table 11: Data of Damp Heat Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP_o (dB)	ΔS (dB)
1	0.0	-25.0	-0.2	-24.8	-0.2	0.2
2	0.8	-23.7	0.5	-23.5	-0.3	0.2
3	1.5	-23.5	1.3	-23.7	-0.2	-0.2
4	0.9	-24.9	0.7	-24.6	-0.2	0.3
5	0.8	-23.2	0.6	-23.0	-0.2	0.2
6	0.1	-23.3	-0.1	-23.0	-0.2	0.3
7	1.0	-24.0	0.8	-24.0	-0.2	0.0
8	0.5	-22.7	0.6	-22.6	0.1	0.1
9	1.5	-25.0	1.2	-24.8	-0.3	0.2
10	0	-24.3	-0.2	-24.1	-0.2	0.2
11	1.1	-24.8	1.0	-24.5	-0.1	0.3
Statistics						
AVE	0.75	-24.04	0.56	-23.87	-0.18	0.16
SD	0.52	0.78	0.51	0.74	0.10	0.14
MAX	1.50	-22.70	1.30	-22.60	0.10	0.30
MIN	0.00	-25.00	-0.20	-24.80	-0.30	-0.20

5.8 ESD Threshold

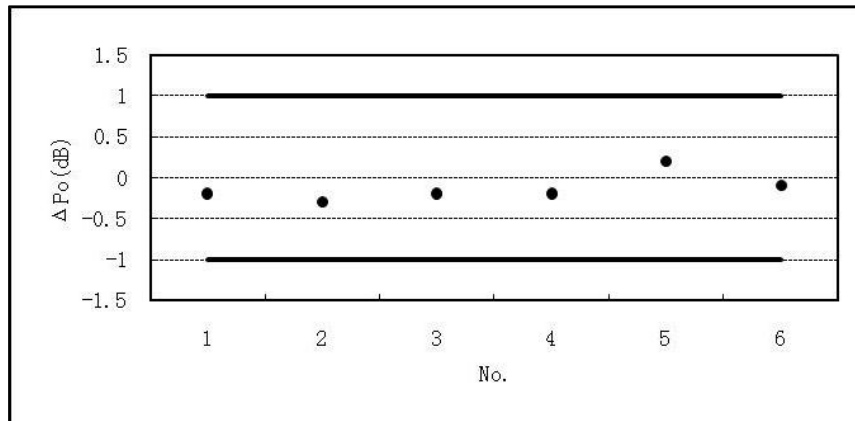


Figure 12: Optical Power Variation in ESD Threshold Test

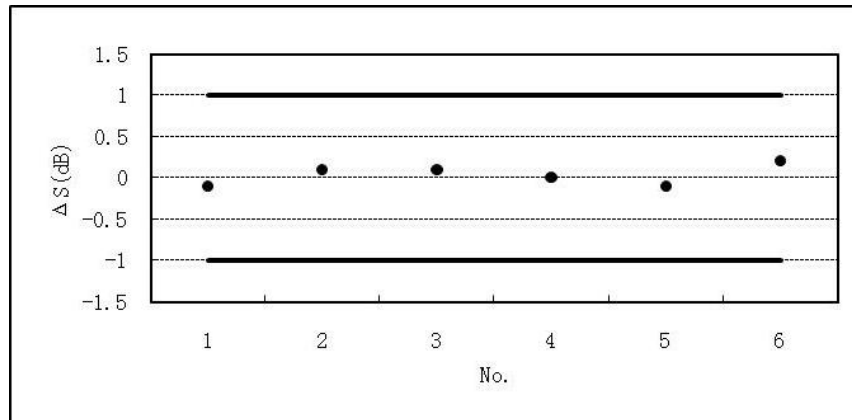


Figure 13: Receiver Sensitivity Variation in ESD Threshold Test

Table 12: Data of ESD Threshold Test (1KV Signal Pin)

No.	Before Test		After Test		Before and After Test Variation	
	P_o (dBm)	Sensitivity (dBm)	P_o (dBm)	Sensitivity (dBm)	ΔP_o (dB)	ΔS (dB)
1	-0.2	-24.8	-0.4	-24.9	-0.2	-0.1
2	0.5	-23.5	0.2	-23.4	-0.3	0.1
3	1.3	-23.7	1.1	-23.6	-0.2	0.1
4	0.7	-24.6	0.5	-24.6	-0.2	0.0
5	0.6	-23.0	0.8	-23.1	0.2	-0.1

6	-0.1	-23.0	-0.2	-22.8	-0.1	0.2
Statistics						
AVE	0.75	-24.04	0.56	-23.87	-0.18	0.16
SD	0.52	0.78	0.51	0.74	0.10	0.14
MAX	1.50	-22.70	1.30	-22.60	0.10	0.30
MIN	0.00	-25.00	-0.20	-24.80	-0.30	-0.20

5.9 ESD Immunity

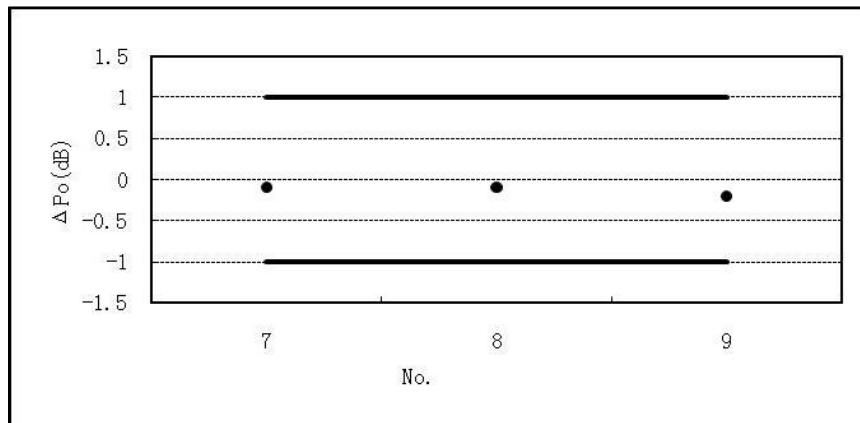


Figure 14: Optical Power Variation in ESD Immunity Test

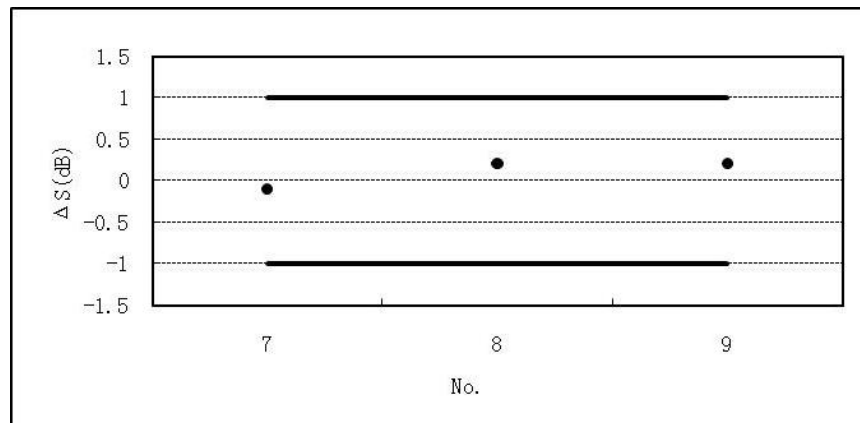


Figure 15: Receiver Sensitivity Variation in ESD Immunity Test

Table 13: Data of ESD Immunity Test (Class 4)

No.	Before Test	After Test	Before and After Test Variation
-----	-------------	------------	------------------------------------

	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP _o (dB)	ΔS (dB)
7	0.8	-24.0	0.7	-24.1	-0.1	-0.1
8	0.6	-22.6	0.5	-22.4	-0.1	0.2
9	1.2	-24.8	1.0	-24.6	-0.2	0.2
Statistics						
AVE	0.87	-23.80	0.73	-23.70	-0.13	0.10
SD	0.25	0.91	0.21	0.94	0.05	0.14
MAX	1.20	-22.60	1.00	-22.40	-0.10	0.20
MIN	0.60	-24.80	0.50	-24.60	-0.20	-0.10

5.10 Visual Inspection

Table 14: Data of Visual Inspection Test

No.	01	02	03	04	05	06	07	08	09	10	11
End Inspection	OK*	OK*	OK*	OK*	OK*	OK*	OK*	OK*	OK*	OK*	OK*

Note: OK* shows that the 11 samples meet the received criterion prescribed by MIL-STD-883

5.11 Power Temperature Cycling Test

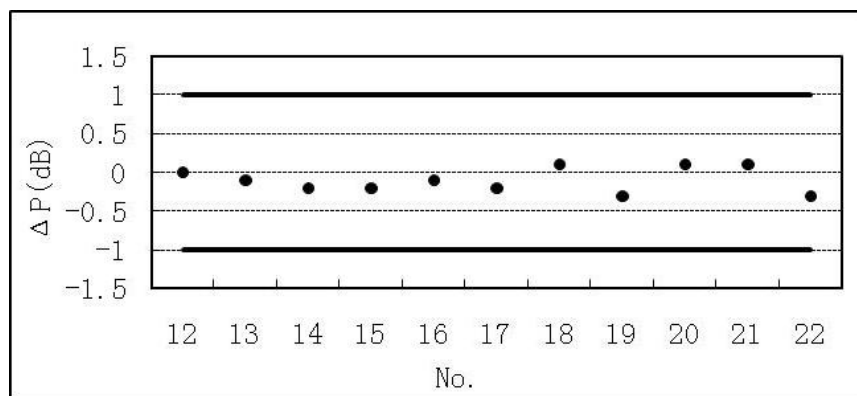


Figure 16: Optical Power Variation in Power Temperature Cycling Test

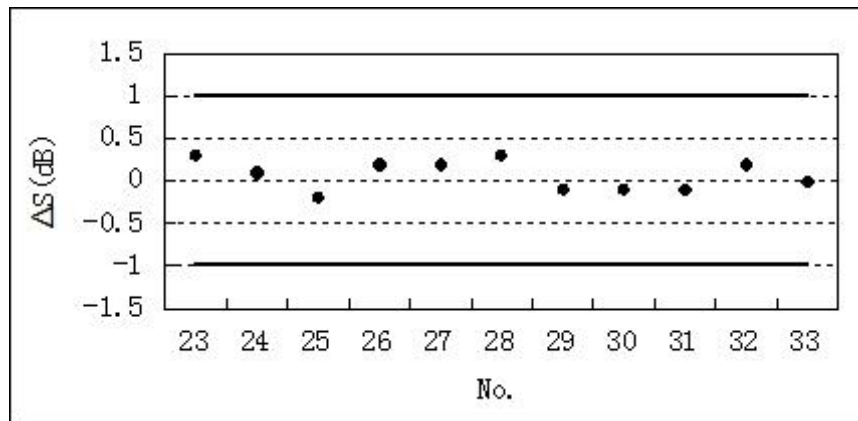


Figure 17: Receiver Sensitivity Variation in Power Temperature Cycling Test

Table 15: Data of Power Temperature Cycling Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP_o (dB)	ΔS (dB)
12	0.6	-25.0	0.6	-24.8	0.0	0.2
13	1.4	-24.2	1.3	-24.0	-0.1	0.2
14	0.7	-23.2	0.5	-23.0	-0.2	0.2
15	0.7	-25.5	0.5	-25.2	-0.2	0.3
16	0.5	-22.4	0.4	-22.5	-0.1	-0.1
17	0.7	-24.3	0.5	-24.3	-0.2	0.0
18	0.6	-24.1	0.7	-24.3	0.1	-0.2
19	1.8	-24.7	1.5	-24.4	-0.3	0.3
20	0.7	-25.9	0.8	-25.6	0.1	0.3
21	0.9	-23.9	1.0	-24.0	0.1	-0.1
22	0.9	-25.5	0.6	-25.3	-0.3	0.2
Statistics						
AVE	0.86	-24.43	0.76	-24.31	-0.10	0.12
SD	0.37	1.00	0.34	0.90	0.15	0.17
MAX	1.80	-22.40	1.50	-22.50	0.10	0.30
MIN	0.50	-25.90	0.40	-25.60	-0.30	-0.20

5.12 Powered Damp Heat Test

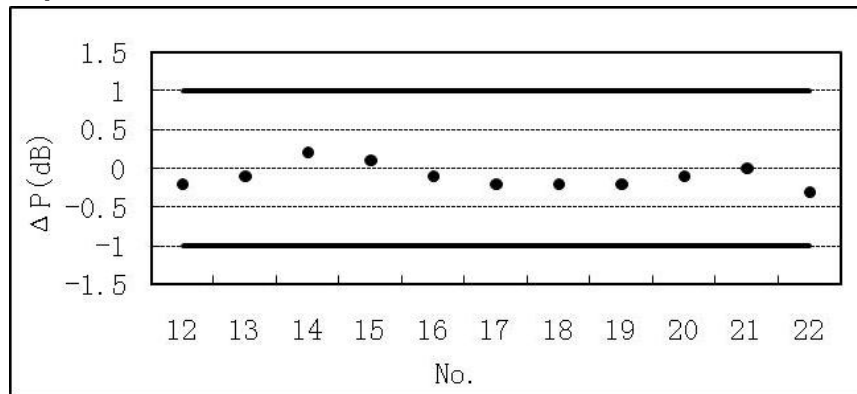


Figure 18: Optical Power Variation in Power Temperature Cycling Test

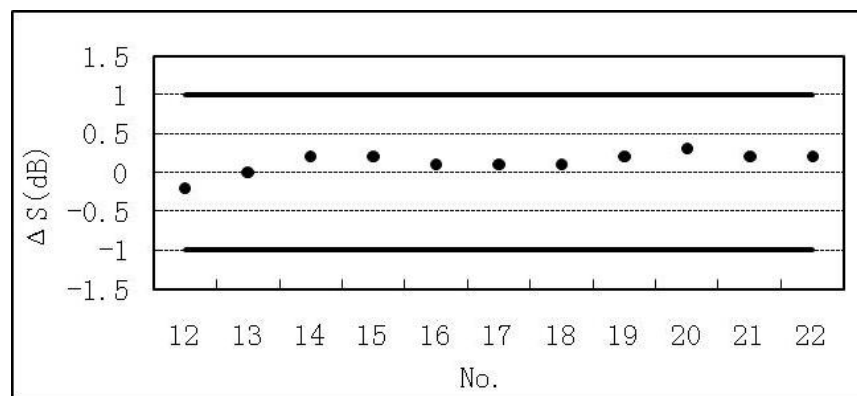


Figure 19: Receiver Sensitivity Variation in Power Temperature Cycling Test

Table 16: Data of Powered Damp Heat Test

No.	Before Test		After Test		Before and After Test Variation	
	P _o (dBm)	Sensitivity (dBm)	P _o (dBm)	Sensitivity (dBm)	ΔP _o (dB)	ΔS (dB)
12	0.6	-24.8	0.4	-25.0	-0.2	-0.2
13	1.3	-24.0	1.2	-24.0	-0.1	0.0
14	0.5	-23.0	0.7	-22.8	0.2	0.2
15	0.5	-25.2	0.6	-25.0	0.1	0.2
16	0.4	-22.5	0.3	-22.4	-0.1	0.1
17	0.5	-24.3	0.3	-24.2	-0.2	0.1
18	0.7	-24.3	0.5	-24.2	-0.2	0.1
19	1.5	-24.4	1.3	-24.2	-0.2	0.2

20	0.8	-25.6	0.7	-25.3	-0.1	0.3
21	1.0	-24.0	1.0	-23.8	0.0	0.2
22	0.6	-25.3	0.3	-25.1	-0.3	0.2
Statistics						
AVE	0.76	-24.31	0.66	-24.18	-0.10	0.13
SD	0.34	0.90	0.34	0.89	0.14	0.13
MAX	1.50	-22.50	1.30	-22.40	0.20	0.30
MIN	0.40	-25.60	0.30	-25.30	-0.30	-0.20

5.13 Accelerating Aging

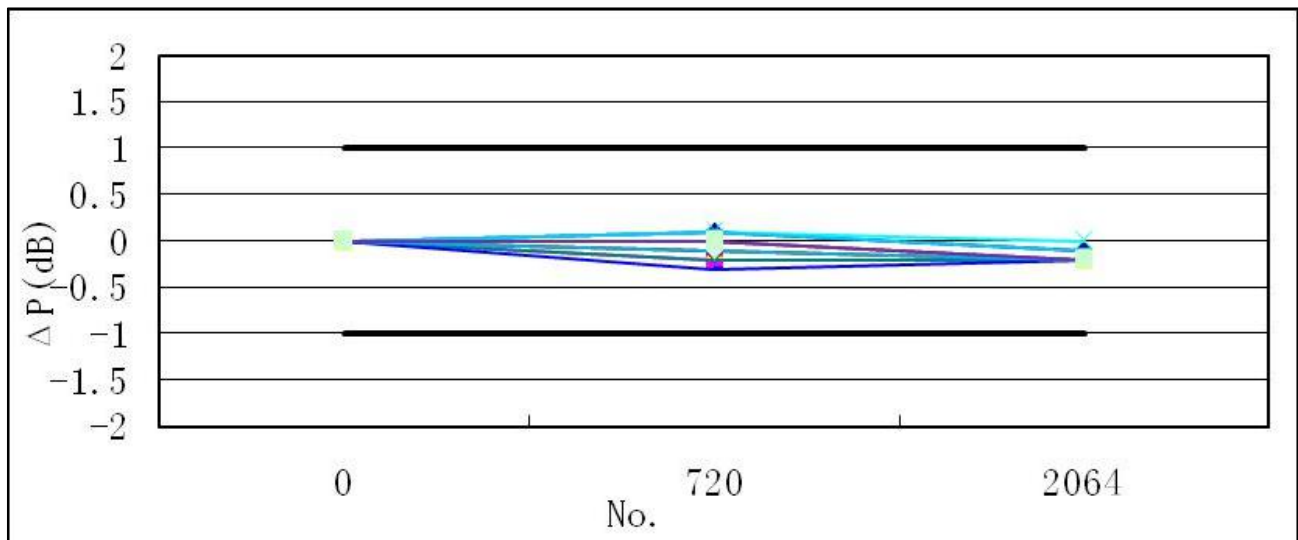


Figure 20: Optical Power Variation in Accelerating Aging Test

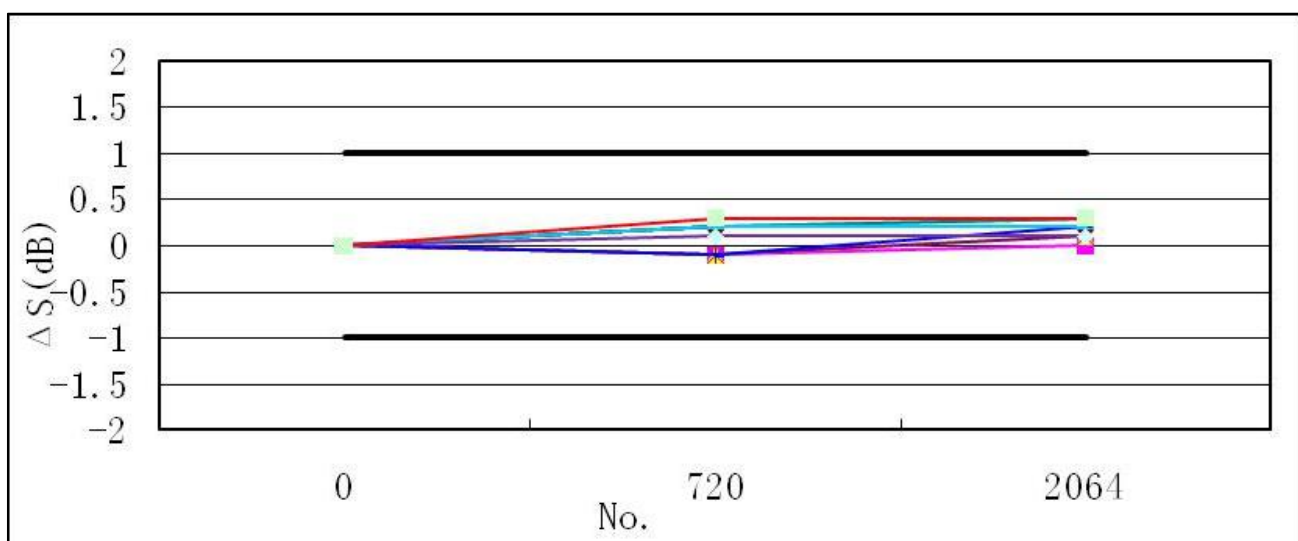


Figure 21: Receiver Sensitivity Variation in Accelerating Aging Test

Table 17: Optical Power of Accelerating Aging Test

Time (hrs)	23	24	25	26	27	28	29	30	31	32	33
0	0.4	1.2	0.7	0.6	0.3	0.3	0.5	1.3	0.7	1.0	0.3
720	0.5	1.0	0.6	0.7	0.3	0.2	0.3	1.0	0.8	0.9	0.3
2064	0.3	1.0	0.5	0.6	0.1	0.1	0.3	1.1	0.6	0.8	0.1

Table 18: Receiver Sensitivity of Accelerating Aging Test

Time (hrs)	23	24	25	26	27	28	29	30	31	32	33
0	-25	-24	-22.8	-25	-22.4	-24.2	-24.2	-24.2	-25.3	-23.8	-25.1
720	-24.8	-24.1	-22.9	-24.8	-22.5	-24.0	-24.0	-24.3	-25.1	-23.7	-24.8
2064	-24.8	-24.0	-22.7	-24.7	-22.3	-24.0	-23.9	-24.0	-25.1	-23.7	-24.8