

Dual & Single Fiber DWDM OADM

Data Center & Cloud Computing Infrastructure Solutions



Overview

DWDM Optical Add/Drop multiplexer (OADM) is a passive optical device used in WDM networks for adding and dropping one/multiple 100 GHz DWDM channels in the C-band into one or two fibers, while letting the rest of the wavelengths bypass to the needed destination. Using the DWDM technology can add effectively WDM capability to their existing and new networks, and extend the optical signals transmission distance.

DWDM OADM modules are available in single-sided (East or West) and dual-sided (East and West) configurations. With matching MUX/DEMUX units placed at each end of an optical link, multiple data channels can be combined and transmitted over a single-mode fiber trunk. The passive OADM modules can add or drop up to 4 data channels at any point along the trunk.

Highlights


- Low insertion loss
- Add/drop channels at remote sites
- Protocol transparent (support 1G, 10G etc.)
- Based on thin film optics with epoxy free optical path
- Fully compliant with CE, FCC, ISO, ITU-T G.694.2, RoHS, Telcordia GR1209 and GR1221
- Completely passive, no power or maintenance required
- Ideal for DWDM ring structures or daisy chain applications
- Various connectors are available - LC/SC/FC/ST, UPC/APC polish
- Optional monitor/1310nm port for external functions

Line Type


Dual Fiber	Single Fiber
------------	--------------

Dual fiber DWDM OADM adds and drops optical signals of same wavelengths into two fibers, while letting the rest of the wavelengths bypass to the needed destination. The DWDM transceiver connected to DWDM OADM should have the same wavelength as the client port.

In single fiber applications, DWDM OADM adds and drops optical signals of different wavelengths into a fiber in the opposite direction. It utilizes a single fiber for both adding and dropping, which reduces overall costs, and increases the capacity of the fiber.

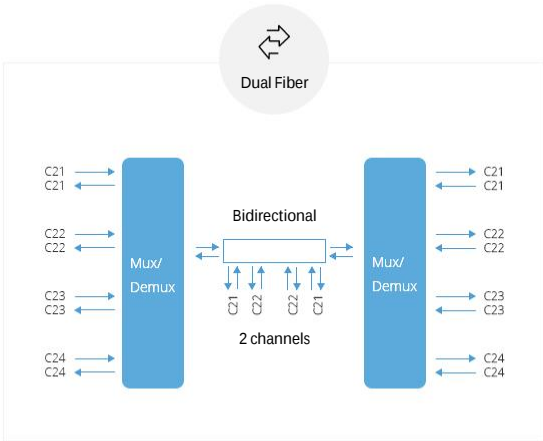

Wavelengths for Add/Drop are the same

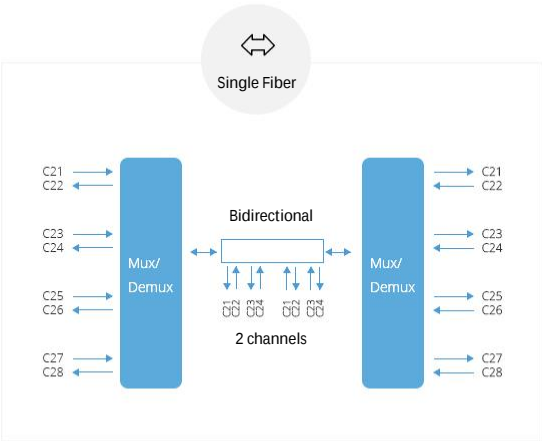

Wavelengths for Add/Drop are different

Technical Data

Parameter	Dual Fiber								
Transmission Direction	West and East					West or East			
Number of Channels	1ch	2ch	4ch	8ch	16ch	1ch	2ch	4ch	8ch
Operating Wavelength	1520nm - 1570nm								
Channel Spacing	100GHz(0.8nm)								
Channel Passband	±0.11nm								
Insertion Loss (Add/Drop)	≤1.0dB	≤1.3dB	≤2.0dB	≤3.0dB	≤4.75dB	≤1.0dB	≤1.5dB	≤2.0dB	≤3.0dB
Insertion Loss (Pass-through)	≤1.1dB	≤1.5dB	≤2.6dB	≤4.0dB	≤10.0dB	≤1.0dB	≤1.5dB	≤2.0dB	≤3.0dB
Insertion Loss (+ 1% Mon)	≤ +0.6dB					≤ +0.3dB			
Insertion Loss (+ 1310nm port)	≤ +0.6dB					≤ +0.3dB			
Adjacent Channel Isolation	≥30dB								
Non-adjacent Channel Isolation	≥35dB								
Output Channel Isolation	≥13dB								
Technology	TFF								
Passband Ripple	≤0.50dB								
Polarization Dependent Loss	≤0.3dB								
Return Loss	≥45dB								
Directivity	≥45dB								
Polarization Mode Dispersion	≤0.10ps								
Power Handling	≤300mW								
Operating Temperature	-40 ~ 85° C								
Storage Temperature	-40 ~ 85° C								
Fiber Type	G657 A1								
Compliance	CE, FCC, ISO, ITU-T G.694.1, RoHS, Telcordia GR1209 and GR1221								

Notes:

1. Specified without connectors. Add an additional 0.2dB loss per connector.
2. If any Mon/1310nm/1550nm port is added, passband insertion loss will increase about 0.3dB (West or East) / 0.6dB (West and East).

Parameter	Single Fiber							
Transmission Direction	West and East				West or East			
Number of Channels	1ch	2ch	4ch	8ch	1ch	2ch	4ch	8ch
Operating Wavelength	1520nm - 1570nm							
Channel Spacing	100GHz(0.8nm)							
Channel Passband	± 0.11nm							
Insertion Loss (Add/Drop)	≤1.3dB	≤2.0dB	≤3.0dB	≤5.5dB	≤1.3dB	≤1.9dB	≤3.0dB	≤5.0dB
Insertion Loss (Pass-through)	≤1.5dB	≤2.6dB	≤4.0dB	≤8.0dB	≤1.3dB	≤1.9dB	≤3.0dB	≤5.0dB
Insertion Loss (+ 1% Mon)	≤ +0.6dB				≤ +0.3dB			
Insertion Loss (+ 1310nm port)	≤ +0.6dB				≤ +0.3dB			
Adjacent Channel Isolation	≥30dB							
Non-adjacent Channel Isolation	≥35dB							
Output Channel Isolation	≥13dB							
Technology	TFF							
Passband Ripple	≤3.0dB			≤0.50dB				
Polarization Dependent Loss	≤0.3dB							
Return Loss	≥45dB							
Directivity	≥45dB							
Polarization Mode Dispersion	≤0.10ps							
Power Handling	≤300mW							
Operating Temperature	-40 ~ 85° C							
Storage Temperature	-40 ~ 85° C							
Fiber Type	G657 A1							
Compliance	CE, FCC, ISO, ITU-T G.694.1, RoHS, Telcordia GR1209 and GR1221							

Notes:

- 1. Specified without connectors. Add an additional 0.2dB loss per connector.
- 2. If any Mon/1310nm/1550nm port is added, passband insertion loss will increase about 0.3dB (West or East) / 0.6dB (West and East).


Transmission Direction

For adding/dropping DWDM channels across sites, we categorize our DWDM OADM in two groups: single-sided (East or West) and dual-sided (East and West).

If DWDM OADM adds/drops the wavelengths in one side on fiber network, it is the East or West module; On the contrary, it is the East and West module.


East and West

The dual-sided OADM removes one channel from the network in one direction and sends it to a local interface in one direction. It also allows a second local port to add the same channel back onto the network fiber in the opposite direction.

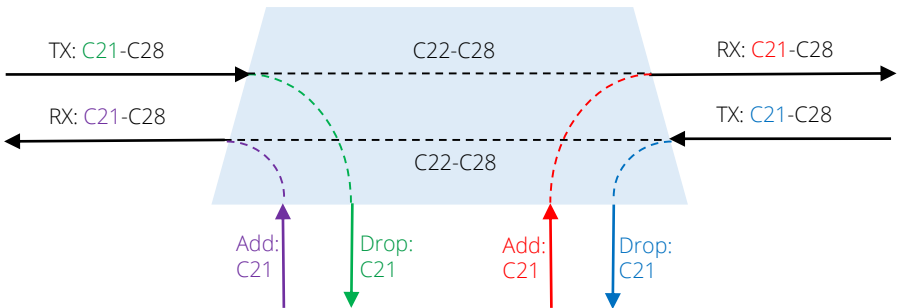

East or West

The single-sided OADM removes one channel from the network in one direction and sends it to a local interface. The remaining channels are passed straight through to other nodes along the network.

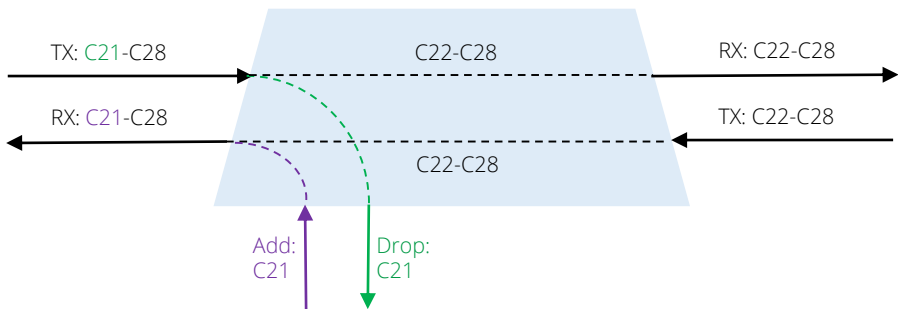

Special Service

■ Monitor Port

It is used to monitor or test the power signal, usually at a 1% ratio, 2%, 3%, 5%, etc, also available. By connecting with measurement or monitoring equipment, such as power meters, spectrum analyzer, or FMT AIU/OPD card, the signal can be inspected without interrupting the existing network.

■ 1310nm Ports

The 1310nm is actually the WDM wavelength. Many optical transceivers support long-haul transmission over this wavelength. By connecting with the same wavelength optical transceivers, this port can be used to add 1310nm wavelength into existing DWDM networks.

PS:
DWDM Mux/Demux can't add 1550nm port due to DWDM wavelength range near 1550nm wavelength.



Monitor port

Ensure easy troubleshooting without downtime, 1% ratio as default, 2%, 3%, 5%, etc, also available.

OR

1310nm port

Allow existing legacy 1310nm traffic to be added such as 1000Base SFP LX, 10G SFP+LR

Type of Special Port	Pass Band Wavelength Range	Reflection Band Wavelength Range	Wavelength that can't be Used
1310nm port	T1260~1360nm	R1380~1620nm	1270nm,1290nm,1310nm, 1330nm,1350nm,1370nm

Housing & Enclosure

FS.COM provides 4 different package options for DWDM OADM, including FMU&FUD plug-in module, ABS pigtailed module and 1U 19" rack mount, as well as the matched chassis.

DWDM OADM Optional Housing

FMU 2-slot 1U Rack

481.8mm

261.2mm

44mm

212mm

FMU Plug-in module

FUD 4-slot 1U Rack

482.6mm

250mm

44mm

195mm

215mm

FUD Plug-in module

481.8mm

261.2mm

44mm

1U 19" Rack Mount

ABS Pigtailed module

0.9mm/2.0mm/3.0mm cable diameter can be customized.

Ordering Information

Mux Demux & OADM		
DWDM MUX DEMUX	FMU-D402160M3	40 Channels 100GHz C21-C60, with 1310nm and Monitor Port, 3.5dB Typical IL, LC/UPC, Dual Fiber DWDM Mux Demux, 1U Rack Mount #35887
	M6200-D2160M	40 Channels 100GHz C21-C60 Dual Fiber DWDM Mux and Demux with Monitor Port, Pluggable Module, LC/UPC, Integrated with M6200 Series Managed Chassis #120424
	FMU-D162136EM3	16 Channels 100GHz C21-C36, with Monitor, Expansion and 1310nm Port, LC/UPC, Dual Fiber DWDM Mux Demux, 1U Rack Mount #72430
CWDM MUX DEMUX	FMU-MD085360EM3	CWDM/DWDM Hybrid Solution, 8 Channels 100GHz C53-C60, with Monitor, Expansion and 1310nm Port, LC/UPC, Dual Fiber DWDM Mux Demux, FMU Plug-in Module #72433
	FMU-C182761M	18 Channels 1270-1610nm, with Monitor Port, LC/UPC, Dual Fiber CWDM Mux Demux, 1U Rack Mount #33489
	FMU-MC084761EM	8 Channels 1470-1610nm, with Monitor and Expansion Port, LC/UPC, Dual Fiber, Low Insertion Loss CWDM Mux Demux, FMU Plug-in Module #78163
LWDM MUX DEMUX	ABS-L042930A	4 Channels 1295.56-1309.14nm, Single Fiber LAN-WDM Mux Demux, Side-A, ABS Pigtailed Module, LC/UPC #97782
	ABS-C062737A	6 Channels 1271-1371nm, Single Fiber CWDM Mux Demux, Side-A, ABS Pigtailed Module, LC/UPC #97784
OADM	DOADM-DF	Customized Dual Fiber & Single Fiber DWDM OADM #70427
	COADM-DF	Customized Dual Fiber & Single Fiber CWDM OADM #70425
Chassis	FMU-1UFMX-N	FMU 2-Slot 1U 19" Rack Chassis Unloaded, holds up to 2 Units FMU Plug-in Module #30408
	FUD-1UFMX-N	FUD 4-Slot 1U 19" Rack Chassis Unloaded, holds up to 4 Units FUD Plug-in Module #106578
TRANSPONDERS & MUXPONDERS		
8x 200G	M6800-TSP16	16x 100G QSFP28 to 8x 200G CFP2 OTN Managed Transport Platform#111053
100G/200G	M6500-TMXP5	2x 100G QSFP28/4x 40G QSFP+ to 1x 200G CFP2 Transponder/Muxponder#111049
10G	M6200-OEO10G	5 Channels WDM Transponder (Converter), 10 SFP/SFP+ Slots#107365
	M6500-CH2U	2U Managed Chassis Unloaded Platform, Supports 2x 200G Transponder/Muxponder #96454
	M6500-CH5U	5U Managed Chassis Unloaded Platform, Supports 6x 200G Transponder/Muxponder #111050
	M6200-CH2U	2U Managed Chassis Unloaded Platform, Supports 7x Mux/DEMUX/EDFA/OEO/OLP/DCM Cards #107371
	M6200-CH5U	5U Managed Chassis Unloaded Platform, Supports 15x MUX/DEMUX/EDFA/OEO/OLP/DCM Cards #111052

OPEN LINE SYSTEM

Amplifiers	M6200-25PA	25dB Gain DWDM EDFA Pre-Amplifier, 16dBm Output#107367
	M6200-20BA	20dBm Output DWDM EDFA Booster Amplifier, 16dB Gain#107366
Dispersion Compensation	M6200-DCM40	40KM DCF-based Passive Dispersion Compensation Module#107370
	M6200-DCM80	80KM DCF-based Passive Dispersion Compensation Module#119071
Line Protection	M6200-OLP2	1+1 Optical Line Protection Switch (OLP)#107368
Red/Blue Filter	M6200-RB	1x2 Single Fiber DWDM Red/Blue Filter#107369
VOA Units	M6200-SFPVOA	SFP Variable Optical Attenuator Module#107373
	AT-M-LCU	Fixed Fiber Optic Attenuators #70009
Chassis	M6200-CH2U	2U Managed Chassis Unloaded Platform, Supports 7x Mux/DEMUX/EDFA/OEO/OLP/DCM Cards #107371
	M6200-CH5U	5U Managed Chassis Unloaded Platform, Supports 15x MUX/DEMUX/EDFA/OEO/OLP/DCM Cards #111052

WDM TRANSCEIVERS

100G/200G CFP2	M-CFP2-DCO	C14 1566.31nm 100G/200G Tunable CFP2-DCO Coherent Transceiver, up to 1000km #120128
	DWDM-SFP25G-10	25G DWDM SFP28 100GHz 1563.86nm 10km DOM LC SMF Optical Transceiver Module #87000
25G SFP28	CWDM-SFP25G-40S	25G 1270nm CWDM SFP28 40km DOM LC SMF Optical Transceiver Module #100112
	CWDM-SFP25G-10SP	25G 1270nm CWDM SFP28 10km DOM LC SMF Optical Transceiver Module #76003
	LWDM-SFP25G-40	25G LWDM SFP28 1286.66nm 40km DOM LC SMF Optical Transceiver Module #93786
	DWDM-SFP16G-40	Customized 16G DWDM SFP+ C20-C61 100GHz 40km DDM LC SMF Transceiver Module#73084
16G/8G FC	DWDM-SFP16GH-40	Customized 16G DWDM SFP+ 50GHz 40km DDM LC SMF Transceiver Module #73085
	CWDM-SFP16G-40	Customized 16G Fiber Channel CWDM SFP+ 1470-1610nm 40km DDM LC SMF Transceiver Module #80765

10G SFP+	DWDM-SFP10G-80	10G DWDM SFP+ 1559.79nm 80km DOM LC SMF Transceiver Module, Commercial Temperature#31237, Industrial Temperature#113562
	DWDM-SFP10G-40	10G DWDM SFP+ 1560.61nm 40km DOM LC SMF Transceiver Module, Commercial Temperature#38731, Industrial Temperature#113511
	DWDM-SFP10G-C	10G DWDM C-band Tunable SFP+ 50GHz 80km DOM LC SMF Transceiver Module #69267
	CWDM-SFP10G-80L	10G CWDM SFP+ 1470nm 80km DOM LC SMF Transceiver Module #19367
	CWDM-SFP10G-40S	10G CWDM SFP+ 1270nm 40km DOM LC SMF Transceiver Module, Commercial Temperature#22168, Industrial Temperature#112392
1G SFP	DWDM-SFP1G-EZX	1000BASE-DWDM SFP 100GHz 1563.86nm 100km DOM LC SMF Transceiver Module #54150
	DWDM-SFP1G-ZX	1000BASE-DWDM SFP 1563.86nm 80km DOM LC SMF Transceiver Module #47697
	CWDM-SFP1G-EZX	1000BASE-CWDM SFP 1270nm 120km DOM LC SMF Transceiver Module #102776
	CWDM-SFP1G-ZX	1000BASE-CWDM SFP 1270nm 80km DOM LC SMF Transceiver Module #33234

*Standard products are listed above. Customized specifications are available upon request.