


25GBASE- SFP28 1310nmTX/1270nmRX 30km Industrial DOM Transceiver

SFP-25G23-BX30-I

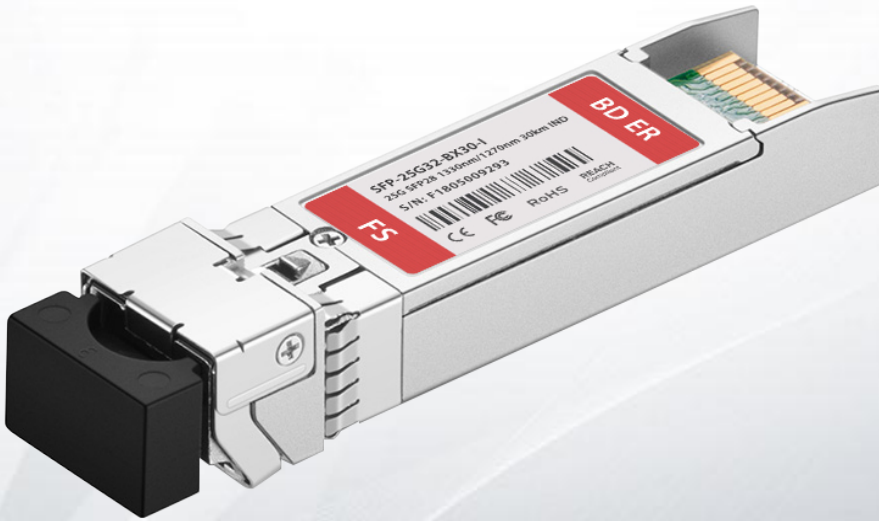

Applications

- 25GBASE-ER
- CPRI Option 10/e CPRI

Standards

- SFF-8472
- SFF-8402
- SFF-8432
- SFF-8431
- CEI-28G-VSR

Features

- Up to 30 km Transmission Distance
- Low Power Consumption <1.5W
- Single 3.3V $\pm$ 5% Power Supply
- LC Single Connector
- -40°C to 85°C Operating Case Temperature Range
- Hot Pluggable SFP28 MSA Compliant

Description

The SFP28 transceiver provides up to 30km of 25GBase-BX throughput over single-mode fiber (SMF) using 1310nm-TX/1270nm-RX wavelengths via LC simplex connectors. This bi-directional unit must be used with another transceiver or network equipment of complementary wavelengths.It provides 25GBASE Ethernet connectivity options for 25G Ethernet, telecom, data center and 5G Network Fronthaul. It is fully compliant with SFF-8472, SFF-8402, SFF-8432, SFF-8431, MSA and eCPRI standards.

Product Specifications

I. Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _s	-40	85	°C
Supply Voltage	V _{cc}	-0.5	3.6	V
Relative Humidity	RH	5	95	%

II. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature Range	T _c	-40		85	°C
Power Supply Voltage	V _{cc}	3.135	3.3	3.465	V
Bit Rate	BR		25.78125		Gb/s
Max Supported Link Length	L			30	km

III. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{CC}	3.315	3.3	3.465	V	
Supply Current	I _{CC}			360	mA	
Transmitter						
Input Differential Impedance	R _{in}		100		Ω	
Single Ended Data Input Swing	V _{in}	90		450	mVp-p	
Transmit Disable Voltage	V _{DIS}	2		V _{CCHOST}	V	
Transmit Enable Voltage	V _{EN}	V _{EE}		V _{EE} +0.8	V	
Transmit Fault Assert Voltage	T _{FA}	2.2		V _{CCHOST}	V	
Transmit Fault De-Assert Voltage	V _{FDA}	V _{EE}		V _{EE} +0.4	V	
Receiver						
Single Ended Data Output Swing	V _{OD}	200		450	mVp-p	
LOS Fault	V _{LOSFT}	2.2		V _{CCHOST}	V	
LOS Normal	V _{LOSNR}	V _{EE}		V _{EE} +0.4	V	


IV. Optical Parameters

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter						
Center Wavelength	λ	1260	1270	1280	nm	1
		1300	1310	1320	nm	2
Side Mode Suppression Ratio	SMSR	30			dB	
Optical Output Power	P_{av}	0		6	dBm	
Extinction Ratio	ER	4			dB	
Transmitter and Dispersion Penalty	TDP			1.5	dB	
Average Launch Power of OFF Transmitter	P_{OFF}			-30	dBm	
Receiver						
Center Wavelength	λ	1300	1310	1320	nm	1
		1260	1270	1280	nm	2
Overload				-7.5	dBm	
Receiver Power	P_{av}	-18			dBm	3
Assert LOS	LOS_A	-30			dBm	
De-Assert LOS	LOS_D			-20	dBm	
LOS Hysteresis		0.5			dB	

Note:

- 1. RTX330-238.
- 2. RTX330-239.
- 3. Measured with 25.78125Gb/s, PRBS 231-1, NRZ, ER>4dB, BER<5E-5.


V. Pin Assignment

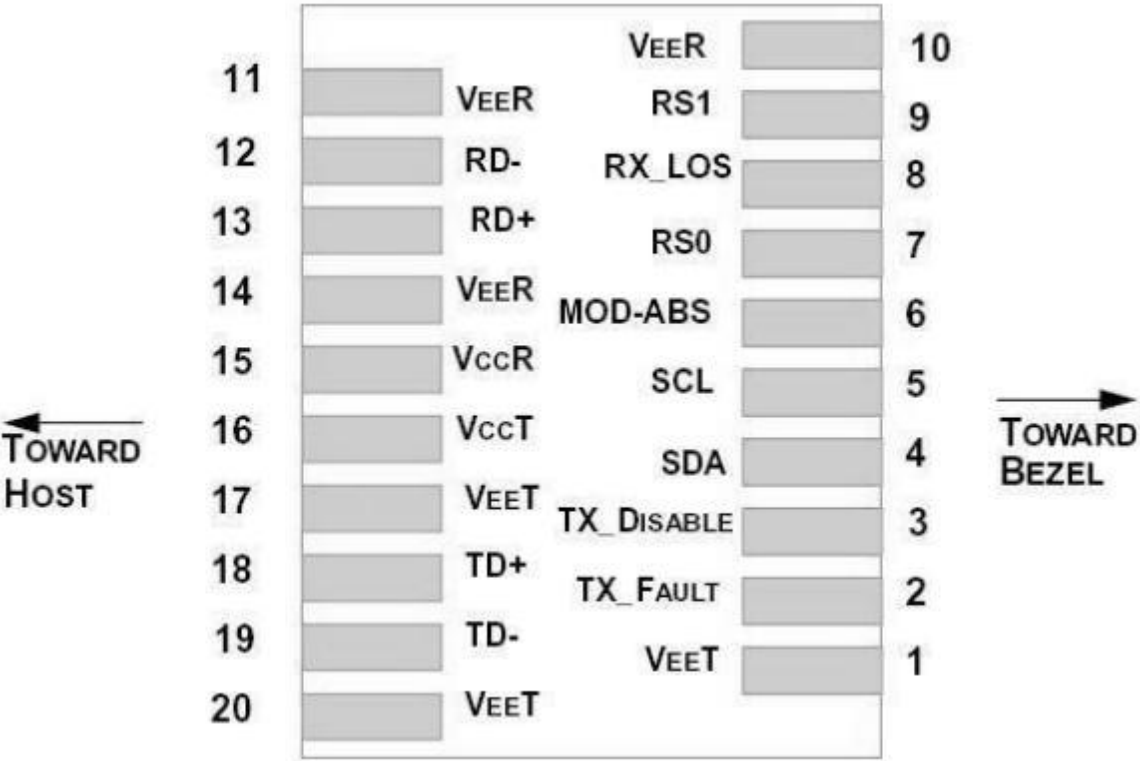


VI. Transceiver Pin Descriptions

Pin No.	Symbol	Logic	Description
1, 17, 20	V _{EE} T		Connected to signal ground on the host board
2	TX Fault	LVTTL Output	Module transmitter fault output
3	TX Disable	LVTTL Input	Module transmitter disable control
4	SDA	LVTTL Input/Output	2-wire serial interface data
5	SCL	LVTTL Input/Output	2-wire serial interface clock
6	MOD-ABS		Module absent (connected to Module ground)
7	RS0	LVTTL Input	Rate select 0 (Rx) :Low=CDR Bypass ; High=CDR Select
8	LOS	LVTTL Output	Receiver loss of signal
9	RS1	LVTTL Input	Rate select 1 (Tx) :Low=CDR Bypass ; High=CDR Select
10, 11, 14	V _{EE} R		Connected to signal ground on the host board.
12	RD-	CML Output	Receiver inverted data output, internally AC coupled and terminated
13	RD+	CML Output	Receiver non-inverted data output, internally AC coupled and terminated.
15	V _{CC} R		Receiver power 3.3V supply
16	V _{CC} T		Transmitter power 3.3V supply
18	TD+	CML Input	Transmitter non-inverted data input, internally AC coupled and terminated.
19	TD-	CML Input	Transmitter inverted data Input, internally AC coupled and terminated.

VII. Principle Diagram

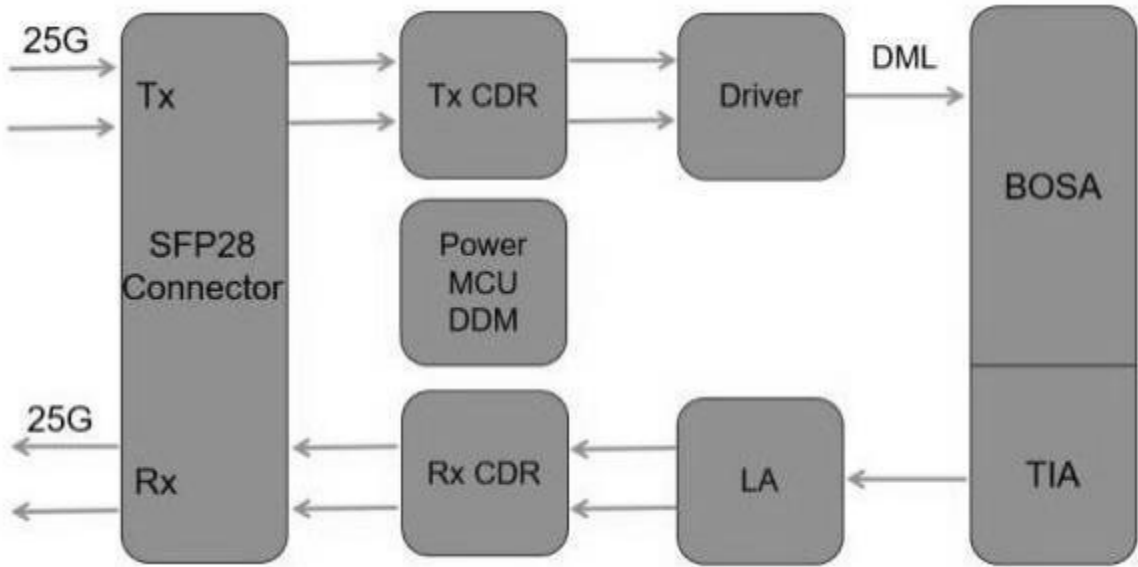

VIII. Mechanical Dimensions:

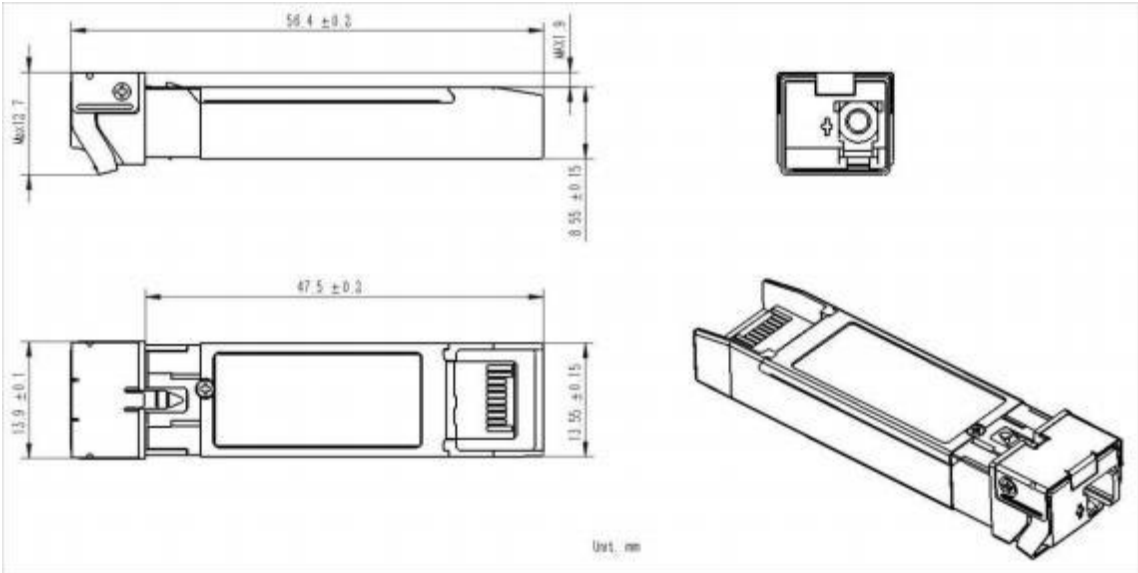

Test Center

I. Compatibility Testing

Each fiber optical transceiver has been tested in host device on site in FS Assured Program to ensure full compatibility with over 200 vendors.



Cisco Catalyst C9500-24Y4C



Cisco MS425-16



Brocade VDX 6940-144S



Dell EMC Networking Z9100-ON



Force¹⁰ S60-44T




HUAWEI S6720-30L-HI-24S

Above is part of our test bed network equipment. For more information, please click the Test Bed PDF. It will be updated in real time as we expand our portfolio.

II. Performance Testing

Each fiber optical transceiver has been fully tested in FS Assured Program equipped with world's most advanced analytical equipment to ensure that our transceivers work perfectly on your device.

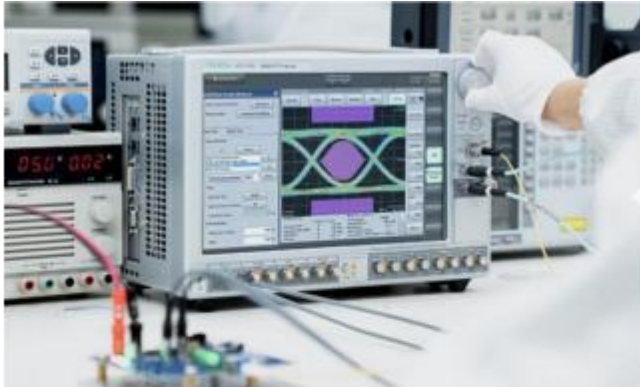

1. TX/RX Signal Quality Testing

Equipped with the all-in-one tester integrated 4ch BERT & sampling oscilloscope, and variable optical attenuator to ensure the input and output signal quality.

- Eye Pattern Measurements: Jitter, Mask Margin, etc
- Average Output Power
- OMA
- Extinction Ratio
- Receiver Sensitivity
- BER Curve



2. Reliability and Stability Testing

Subject the transceivers to dramatic changes in temperature on the thermal shock chamber to ensure reliability and stability of the transceivers.


- Commercial: 0 °C to 70 °C
- Extended: -5 °C to 85 °C
- Industrial: -40 °C to 85 °C



3. Transfer Rate and Protocol Testing

Test the actual transfer data rate and the transmission ability under different protocols with Network Master Pro.

- Ethernet
- Fibre Channel
- SDH/SONET
- CPRI

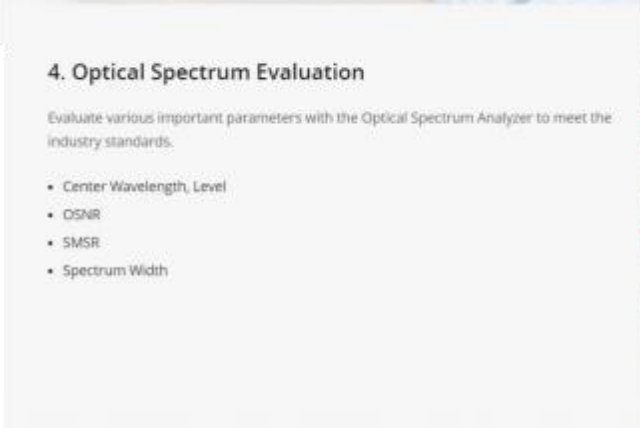

4. Optical Spectrum Evaluation

Evaluate various important parameters with the Optical Spectrum Analyzer to meet the industry standards.

- Center Wavelength, Level
- OSNR
- SMSR
- Spectrum Width



Ordering Information

Part Number	Description
SFP-25G23-BX10	25G SFP28 1270nm-TX/1330nm-RX 10km DOM Transceiver
SFP-25G32-BX10	25G SFP28 1330nm-TX/1270nm-RX 10km DOM Transceiver
SFP-25G23-BX10-I	25G SFP28 1270nm-TX/1330nm-RX 10km Industrial DOM Transceiver
SFP-25G32-BX10-I	25G SFP28 1330nm-TX/1270nm-RX 10km Industrial DOM Transceiver
SFP-25G23-BX20	25G SFP28 1270nm-TX/1330nm-RX 20km DOM Transceiver
SFP-25G32-BX20	25G SFP28 1330nm-TX/1270nm-RX 20km DOM Transceiver
SFP-25G23-BX20-I	25G SFP28 1270nm-TX/1330nm-RX 20km Industrial DOM Transceiver
SFP-25G32-BX20-I	25G SFP28 1330nm-TX/1270nm-RX 20km Industrial DOM Transceiver
SFP-25G23-BX40	25G SFP28 1270nm-TX/1310nm-RX 40km DOM Transceiver
SFP-25G32-BX40	25G SFP28 1270nm-TX/1310nm-RX 40km DOM Transceiver
SFP-25G23-BX40-I	25G SFP28 1270nm-TX/1310nm-RX 40km Industrial DOM Transceiver
SFP-25G32-BX40-I	25G SFP28 1310nm-TX/1270nm-RX 40km Industrial DOM Transceiver