

1000BASE-DWDM SFP 100GHz 1528.77nm-1563.86nm 80km DOM Transceiver

DWDM-SFP1G-ZX



Application

- 1G Fibre channel
- DWDM Networks

Features

- Hot-Pluggable
- Duplex LC connector
- Up to 1.25Gb/s data rate
- 100GHz ITU Grid, C Band
- DWDM COOLED DML transmitter, PIN photo-detector
- SMF links up to 80km
- 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface
- Power Supply :+3.3V
- Power consumption 2W
- Temperature Range: 0~ 70°C
- RoHS compliant

Description

FS's DWDM-SFP1G-ZX is a very compact 1.25Gb/s optical transceiver module for serial optical communication applications at 1.25Gb/s. The DWDM-SFP1G-ZX converts a 1.25Gb/s serial electrical data stream to 1.25Gb/s optical output signal and a 1.25Gb/s optical input signal to 1.25Gb/s serial electrical data streams. The high speed 1.25Gb/s electrical interface is fully compliant with SFI specification. The high performance DWDM COOLED DML transmitter and high sensitivity PIN receiver provide superior performance for Ethernet applications at up to 80km links.

The SFP Module compliants with SFF-8431, SFF-8432 Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP compliant form factor provides hot pluggability, easy optical port upgrades and low EMI emission.

Product Specifications

I. Absolute Maximum Ratings

Parameter	Symbol	Min	Typ.	Max	Unit
Storage Temperature	T _S	-40		+85	°C
Case Operating Temperature	T _A	0		70	°C
Maximum Supply Voltage	V _{cc}	-0.5		4	V
Relative Humidity	RH	0		85	%

II. Electrical Characteristics (TOP = 0 to 70 °C, VCC = 3.135 to 3.465 Volts)

Parameter	Symbol	Min	Typ.	Max	Unit	Ref.
Supply Voltage	V _{cc}	3.135		3.465	V	
Supply Current	I _{cc}			450	mA	
Power Consumption	P			2	W	
Transmitter						
Input differential impedance	R _{in}		100		Ω	1
Tx Input Single Ended DC Voltage Tolerance (Ref VeeT)	V	-0.3		4	V	
Differential input voltage swing	V _{in,pp}	180		700	mV	2

Transmit Disable Voltage	V_D	2		V_{CC}	V	3
Transmit Enable Voltage	V_{EN}	Vee		Vee+0.8	V	
Receiver						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	V_O	300		850	mV	
Rx Output Rise and Fall Time	T_r/T_f	30			ps	4
LOS Fault	$V_{LOS\ fault}$	2		$V_{CC_{HOST}}$	V	5
LOS Normal	$V_{LOS\ norm}$	Vee		Vee+0.8	V	5

- Note (1):** Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
- Note (2):** Per SFF-8431 Rev 3.0.
- Note (3):** Into 100 ohms differential termination.
- Note (4):** 20 – 80 %.
- Note (5):** LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

III. Optical Parameters(TOP = 0 to 70°C, VCC = 3.135 to 3.465 Volts)

Parameter	Symbol	Min	Typ.	Max	Unit	Ref.
Transmitter						
Optical Wavelength-End Of Life	λ	X-100	X	X+100	pm	
Optical Wavelength-Beginning Of Life	λ	X-25	X	X+25	pm	
Average Optical Power	P_{avg}	0		+5	dBm	1
Laser Off Power	P_{off}			-30	dBm	
Extinction Ratio	ER	8.2			dB	
Transmitter Dispersion Penalty	TDP			3.0	dB	

Relative Intensity Noise	Rin	-128	dB/Hz	2
Optical Return Loss Tolerance		20	dB	
Receiver				
Center Wavelength	λ_r	1480	1580	nm
Receiver Sensitivity (OMA)	Sen	-24	dBm	2
Stressed Sensitivity (OMA)	Sen _{ST}	-21	dBm	2
Los Assert	LOS _A	-40	dBm	
Los Dessert	LOS _D	-24	dBm	
Los Hysteresis	LOS _H	0.5	dB	
Overload	Sat	-3	dBm	3
Receiver Reflectance	Rrx	-12	dB	

- Note (1):** Average power figures are informative only Fibre channel.
- Note (2):** 12dB reflection.
- Note (3):** Receiver overload specified in OMA and under the worst comprehensive stressed condition.


IV. Timing Characteristics

Parameter	Symbol	Min	Typ.	Max	Unit
TX_Disable Assert Time	t _{off}			10	us
TX_Disable Negate Time	t _{on}			1	ms
Time to Initialize Include Reset of TX_FAULT	t _{int}			300	ms
TX_FAULT from Fault to Assertion	t _{fault}			100	us
TX_Disable Time to Start Reset	t _{reset}	10			us

Receiver Loss of Signal Assert Time	T_{A,RX_LOS}			100	us
Receiver Loss of Signal Deassert Time	T_{d,RX_LOS}			100	us
Rate-Select Chage Time	$t_{ratesel}$			10	us
Serial ID Clock Time	$t_{serial-clock}$			100	kHz

V. Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

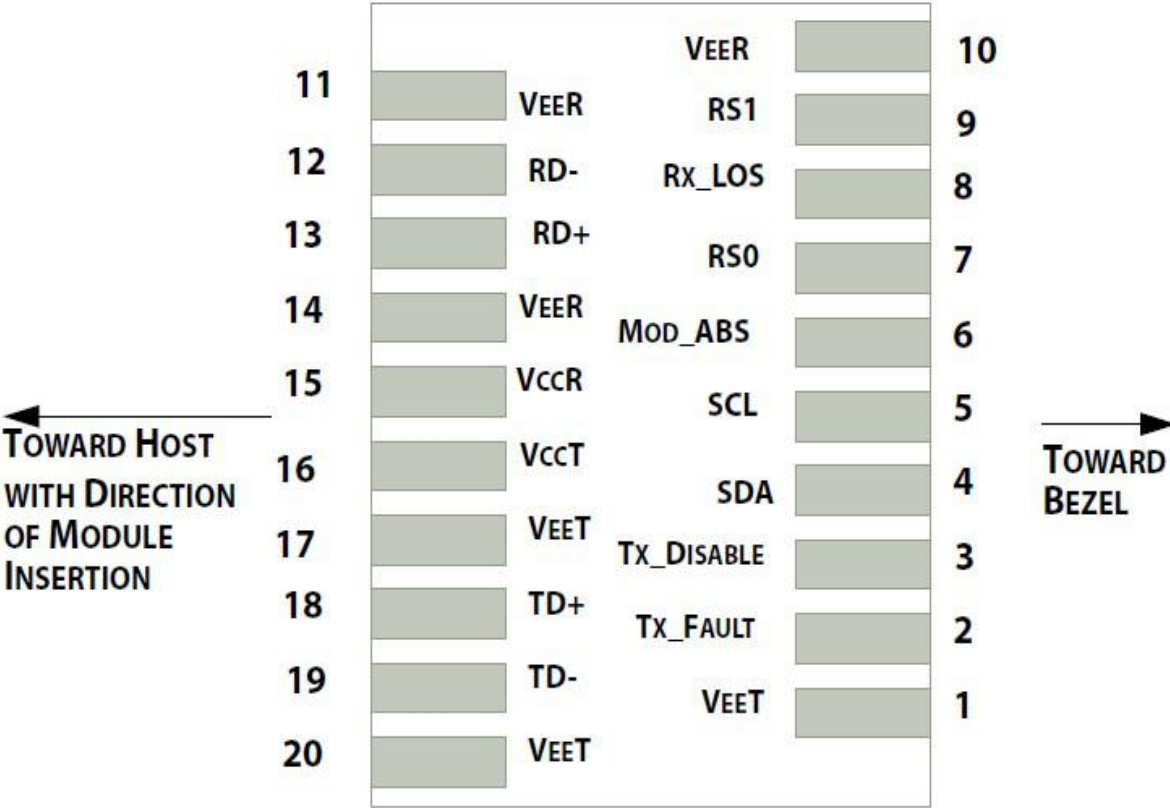

VI. Pin Function Definitions

Pin NO.	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	
5	SCL	2 wire serial interface clock input (SCL)	
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0, optionally control SFP receiver. When high, input data rate >4.5Gb/ s; when low, input data rate <=4.5Gb/s	
8	LOS	Receiver Loss of Signal Indication	4
9	RS1	Rate select0, optionally control SFP transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	1

Note (1): The module ground pins shall be isolated from the module case.

Note (2): This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

- Note (3):** This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
- Note (4):** This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

VII. SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I2C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

Table 1 - Digital Diagnostic Memory Map (Specific Data Field Descriptions)

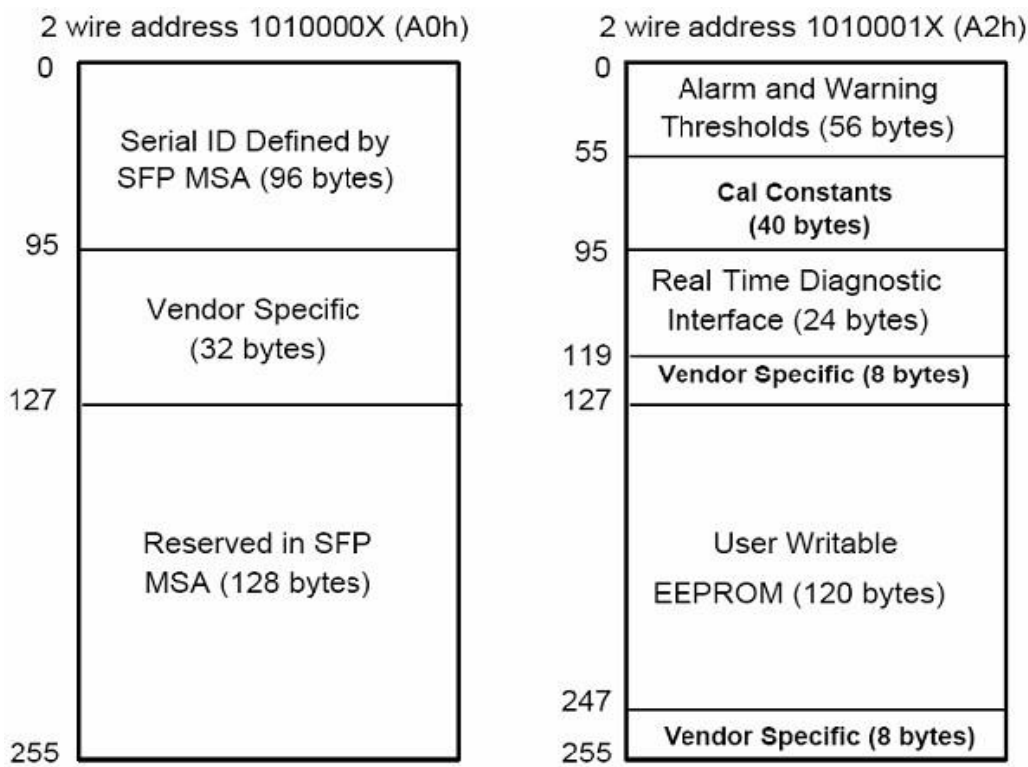


Table 2 - EEPROM Serial ID Memory Contents (A0h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)

2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	10G Base-ZR
11	1	Encoding	64B/66B
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: FS
36	1	Reserved	
37-39	3	Vendor OUI	
40-55	16	Vendor PN	Part Number: "DWDM-SFP-80-Dxx" (ASCII)
56-59	4	Vendor rev	
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62

Extended ID Fields

64-65	2	Option	Indicates which optical SFP signals are implemented(001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %

68-83	16	Vendor SN	
84-91	8	Date code	FS's Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	FS specific date, read only
128-255	128	Reserved	

VIII. Digital Diagnostic Monitor Characteristics


Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±3.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100-101	Laser Bias Current	±10	%
102-103	Tx Output Power	±3.0	dB
104-105	Rx Input Power	±3.0	dB

IX. Regulatory Compliance


The DWDM-SFP1G-ZX complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

Electrostatic Discharge(ESD) to the Electrical Pins	MIL-STD-883EMethod 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD)to the Duplex LC Receptacle	IEC 61000-4-2GR-1089-CORE	Compatible with standards
ElectromagneticInterference (EMI)	FCC Part 15 Class BEN55022 Class B (CISPR 22B)VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11EN60950, EN (IEC) 60825-1,2	Compatible with Class 1 laserproduct.

X. Recommended Circuit

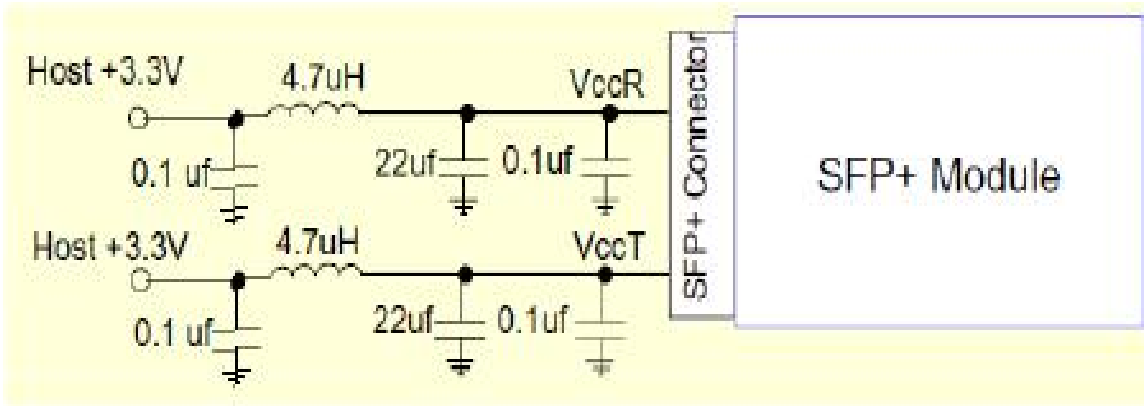


Recommended Host Board Power Supply Circuit

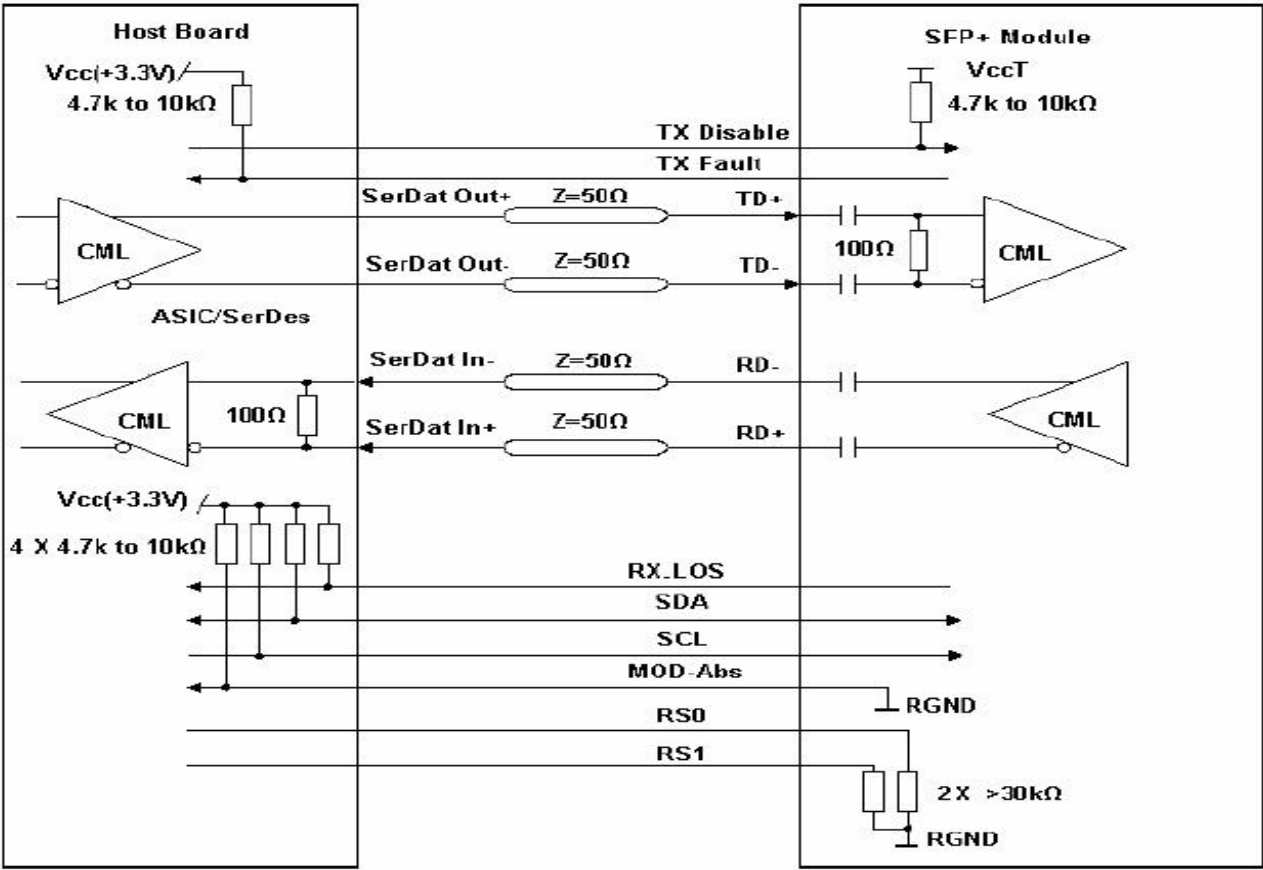

Recommended High-speed Interface Circuit

XI.Mechanical Dimensions

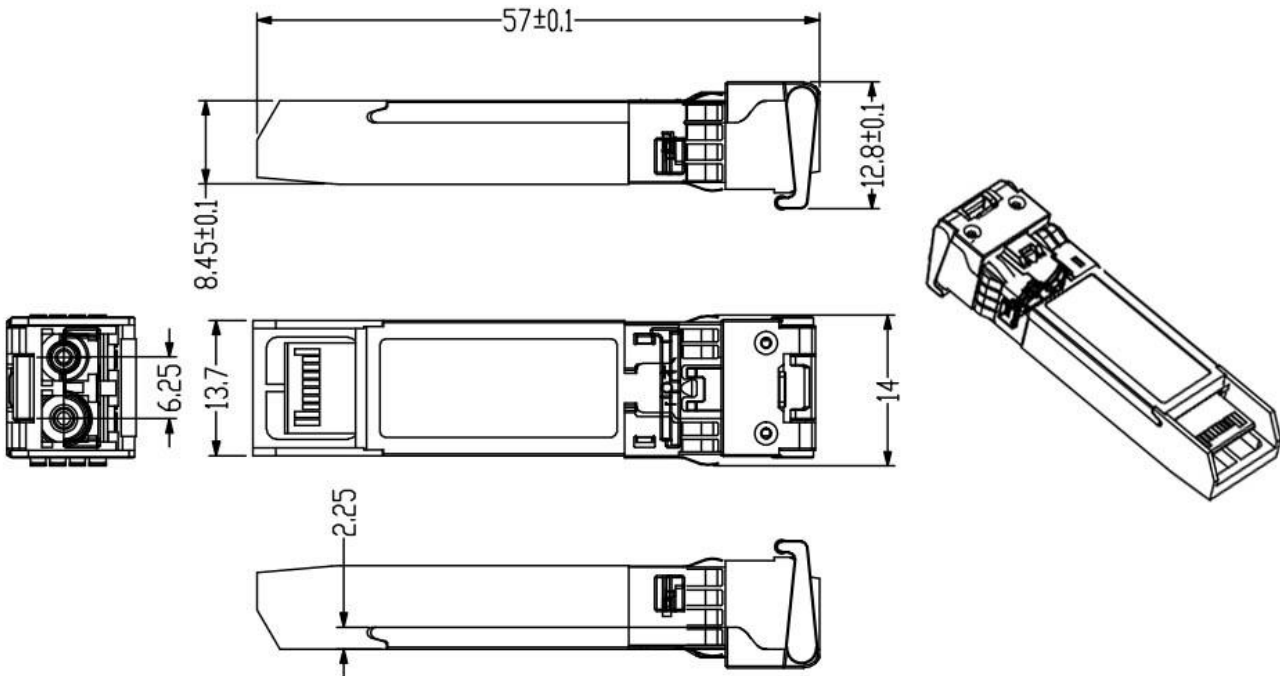


Test Center

I. Compatibility Testing

Each fiber optical transceiver has been tested in host device on site in FS Assured Program to ensure full compatibility with over 200 vendors.



Cisco Catalyst C9500-24Y4C

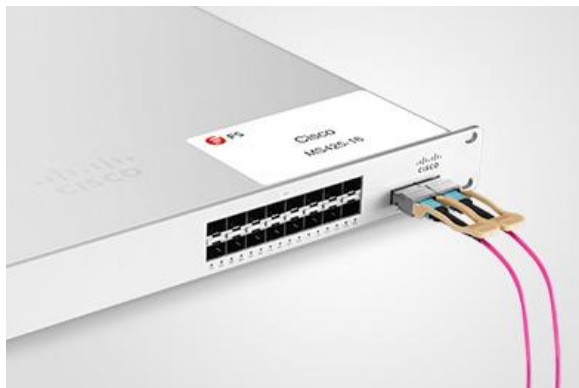

Cisco MS425-16



Brocade VDX 6940-144S



Dell EMC Networking Z9100-ON



Force10 S60-44T




HUAWEI S6720-30L-HI-24S

Above is part of our test bed network equipment. For more information, please click the [Test Bed PDF](#). It will be updated in real time as we expand our portfolio.

II. Performance Testing

Each fiber optical transceiver has been fully tested in FS Assured Program equipped with world's most advanced analytical equipment to ensure that our transceivers work perfectly on your device.

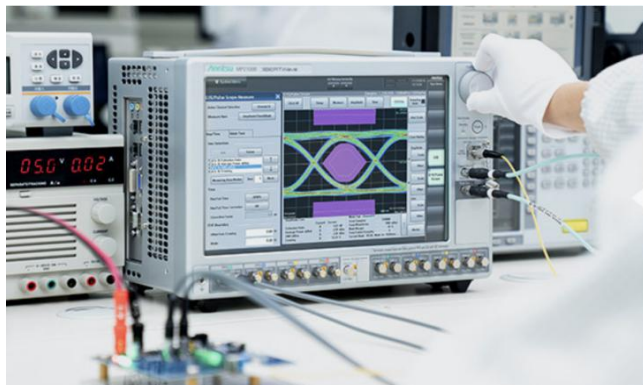

1. TX/RX Single Quality Testing

Equipped with the all-in-one tester integrated 4ch BERT & sampling oscilloscope, and variable optical attenuator the input and output signal quality.

- Eye Pattern Measurements: Jitter, Mask Margin, etc
- Average Output Power
- OMA
- Extinction Ratio
- Receiver Sensitivity
- BER Curve

2. Reliability and Stability Testing

Subject the transceivers to dramatic in temperature on the thermal shock chamber to ensure reliability and stability of the transceivers.

- Commercial: 0°C to 70°C
- Extended: -5°C to 85°C
- Industrial: -40°C to 85°C



3. Transfer Rate and Protocol Testing

Test the actual transfer data rate and the transmission ability under different protocols with Networks Master Pro.

- Ethernet
- Fiber Channel
- SDH/SONET
- CPRI

4. Optical Spectrum Evaluation

Evaluate various important parameters with the Optical Spectrum Analyzer to meet the industry standards.

- Center Wavelength, Level
- OSNR
- SMSR
- Spectrum Width



Order Information

Part Number	Central Wavelength(nm)	Frequency (THZ)
DWDM-SFP1G-ZX	1528.77	196.1
DWDM-SFP1G-ZX	1529.55	196.0
DWDM-SFP1G-ZX	1530.33	195.9
DWDM-SFP1G-ZX	1531.12	195.8
DWDM-SFP1G-ZX	1531.90	195.7
DWDM-SFP1G-ZX	1532.68	195.6
DWDM-SFP1G-ZX	1533.47	195.5
DWDM-SFP1G-ZX	1534.25	195.4
DWDM-SFP1G-ZX	1535.04	195.3
DWDM-SFP1G-ZX	1535.82	195.2
DWDM-SFP1G-ZX	1536.61	195.1
DWDM-SFP1G-ZX	1537.40	195.0
DWDM-SFP1G-ZX	1538.19	194.9
DWDM-SFP1G-ZX	1538.98	194.8
DWDM-SFP1G-ZX	1539.77	194.7
DWDM-SFP1G-ZX	1540.56	194.6

DWDM-SFP1G-ZX	1541.35	194.5
DWDM-SFP1G-ZX	1542.14	194.4
DWDM-SFP1G-ZX	1542.94	194.3
DWDM-SFP1G-ZX	1543.73	194.2
DWDM-SFP1G-ZX	1544.53	194.1
DWDM-SFP1G-ZX	1545.32	194.0
DWDM-SFP1G-ZX	1546.12	193.9
DWDM-SFP1G-ZX	1546.92	193.8
DWDM-SFP1G-ZX	1547.72	193.7
DWDM-SFP1G-ZX	1548.51	193.6
DWDM-SFP1G-ZX	1549.32	193.5
DWDM-SFP1G-ZX	1550.12	193.4
DWDM-SFP1G-ZX	1550.92	193.3
DWDM-SFP1G-ZX	1551.72	193.2
DWDM-SFP1G-ZX	1552.52	193.1
DWDM-SFP1G-ZX	1553.33	193.0
DWDM-SFP1G-ZX	1554.13	192.9
DWDM-SFP1G-ZX	1554.94	192.8

DWDM-SFP1G-ZX	1555.75	192.7
DWDM-SFP1G-ZX	1556.55	192.6
DWDM-SFP1G-ZX	1557.36	192.5
DWDM-SFP1G-ZX	1558.17	192.4
DWDM-SFP1G-ZX	1558.98	192.3
DWDM-SFP1G-ZX	1559.79	192.2
DWDM-SFP1G-ZX	1560.61	192.1
DWDM-SFP1G-ZX	1561.42	192.0
DWDM-SFP1G-ZX	1562.23	191.9
DWDM-SFP1G-ZX	1563.05	191.8
DWDM-SFP1G-ZX	1563.86	191.7